


Screw Type Fuse Links D0 Series

General information

| | |
|-------------------|-------------|
| Class | Gg gL |
| Standard | IEC 60269-2 |
| Rated Voltage | 400V |
| Rated frequency | 50 Hz |
| Breaking Capacity | 50 kA |


Fuse links D0 Series

| Description | Order No | Ir | Ur | Dimensions | | | | | Weight |
|------------------|----------|-----|-----|------------|------|------|-----|----|--------|
| | | A | V | Ø A | Ø B | Ø C | Ø D | L | g |
| D 01 E 14 2A | 5014002 | 2 | 400 | 5 | 7.3 | 10.6 | 10 | 36 | 13 |
| D 01 E 14 4A | 5014004 | 4 | 400 | 5 | 7.3 | 10.6 | 10 | 36 | 13 |
| D 01 E 14 6A | 5014006 | 6 | 400 | 5 | 7.3 | 10.6 | 10 | 36 | 13 |
| D 01 E 14 10A | 5014010 | 10 | 400 | 5 | 8.5 | 10.6 | 10 | 36 | 13 |
| D 01 E 14 16A | 5014016 | 16 | 400 | 5 | 9.7 | 10.6 | 10 | 36 | 13 |
| D 02 E 18 20A | 5018020 | 20 | 400 | 8.5 | 10.9 | 14.5 | 14 | 36 | 14 |
| D 02 E 18 25A | 5018025 | 25 | 400 | 8.5 | 12.1 | 14.5 | 14 | 36 | 14 |
| D 02 E 18 35A | 5018035 | 35 | 400 | 8.5 | 13.3 | 14.5 | 14 | 36 | 14 |
| D 02 E 18 40A | 5018040 | 40 | 400 | 8.5 | 13.3 | 14.5 | 14 | 36 | 14 |
| D 02 E 18 50A | 5018050 | 50 | 400 | 8.5 | 14.5 | 14.5 | 14 | 36 | 14 |
| D 02 E 18 63A | 5018063 | 63 | 400 | 8.5 | 15.9 | 14.5 | 14 | 36 | 14 |
| D 03 M 30x2 80A | 5030080 | 80 | 400 | 17 | 22 | 22 | 21 | 43 | 16 |
| D 03 M 30x2 100A | 5030100 | 100 | 400 | 17 | 25 | 22 | 21 | 43 | 16 |

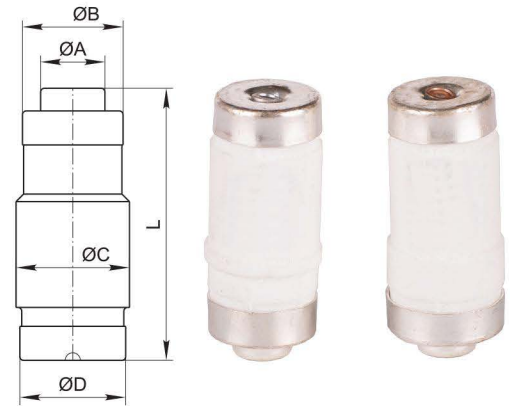

Fuse caps for D0 Series E14, E18

| Type | Order No | Ir | Ur |
|----------|----------|----|-----|
| | | A | V |
| E 14 16A | 5114016 | 16 | 400 |
| E 18 63A | 5118063 | 63 | 400 |

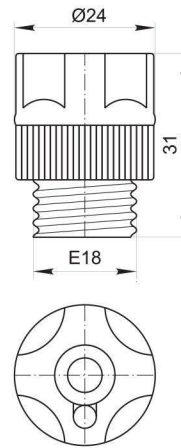

Fuse bases for D0 Series E14, E18

| Type | Order No | Ir | Ur |
|----------|----------|----|-----|
| | | A | V |
| E 14 16A | 5214016 | 16 | 400 |
| E 18 63A | 5218063 | 63 | 400 |

