


Cast resin straight joint for twisted pair shielded pairs with armor and protective outer sheath. Employed in apparatus for the detection of the imbalance of the currents at 50 Hz between the two rails of a track circuit of the automatic current coded block

The kit consists of a quick and easy to install housing and of a room curing polyurethane resin. The kits includes four pre-insulated connectors.

Omologazione F.S. N° 12423 17.6.1986 cat.807/285

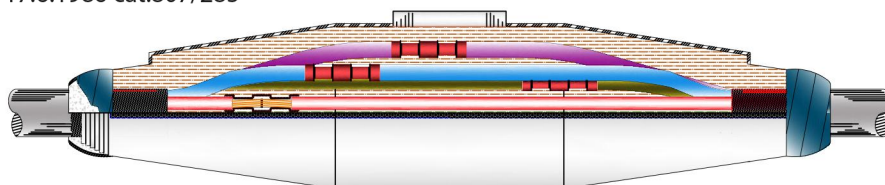


Tensioni Voltage U ₀ /U/U _{max} (kV)	Diametro ingresso cavi Diameter cable entry (mm)	Riferimento prodotto Ordering info	Lunghezza Length (mm)	Diametro Diameter (mm)
0,6/1/1,2	14 ÷ 26	ELCOSIGNAL GLS 0125	276	85

Resin Straight Joint For Polymeric Insulated Telephone Cables

The kit consists of an easy to install housing and of room curing polyurethane resin. Connectors not included.

Cenelec HD 623, CEI EN 50393.

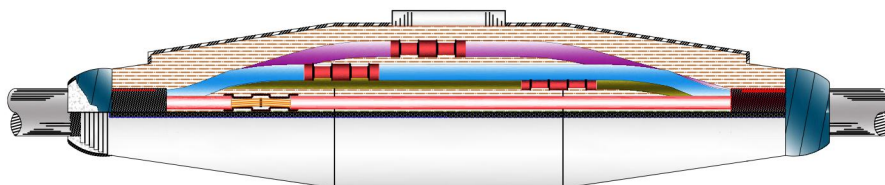

Diametro ingresso cavi Diameter cable entry (mm)	Numero coppie alloggiabili Up to number of pairs	Riferimento prodotto Ordering info	Lunghezza Length (mm)	Diametro Diameter (mm)
14÷26	<= 10	ELCOTEL GLTEL 0115	276	85
28÷40	20 ÷ 30	ELCOTEL GLTEL 0116	370	110
30÷52	50	ELCOTEL GLTEL 0117	480	130
50÷72	100 ÷ 200	ELCOTEL GLTEL 0118	650	150