


## Cold shrink outdoor termination for polymeric 1 core insulated cable and sheath for mechanical protection.

The kit consists of stress control element, cold-shrink anti-tracking bodies and cold-shrink rain sheds.


Compliant with standards  
CENELEC HD 629.1 S2, CEI 20-62/1

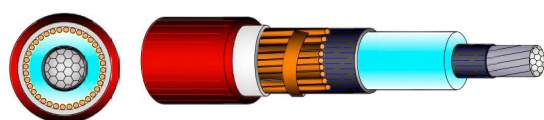

Single Core Polymeric Wire



Single Core Al Tube

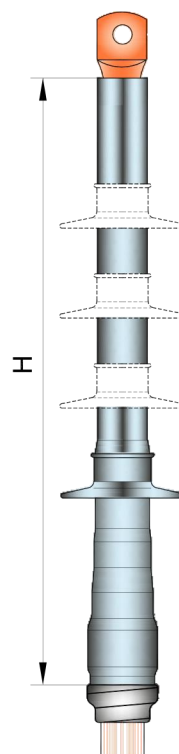

List of kits available for use with crimp and mechanical lugs. Lugs not included.

Famiglia Prodotti Type	Tensioni Voltage U <sub>0</sub> /U/U <sub>max</sub> [kV]	Sezioni Cavi Cable Range [mm <sup>2</sup> ]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	H [mm]	Campane/Fase Rain Sheds/Core
EC TES 64 AR	12/20/24	50/95	EC TES 2464AR M 095 □ □	X	W & A	450	2
		120/240	EC TES 2464AR M 240 □ □	X	W & A	450	2
		300/400	EC TES 2464AR M 400 □ □	X	W & A	500	2
		500/630	EC TES 2464AR M 630 □ □	X	W & A	500	2
	19/33/36	35/70	EC TES 3664AR M 070 □ □	X	W & A	700	4
		95/240	EC TES 3664AR M 240 □ □	X	W & A	700	4
		300/400	EC TES 3664AR M 400 □ □	X	W & A	750	4
		500/630	EC TES 3664AR M 630 □ □	X	W & A	750	4