


RESIN JOINTS for MV polymeric cables

Epoxy resin joint for 1 core cable

The kit consists of epoxy resin and room temperature hardener to restore both insulation and outer protection.

Compliant with standards

CENELEC HD 629.1 S2, CEI 20-62/1

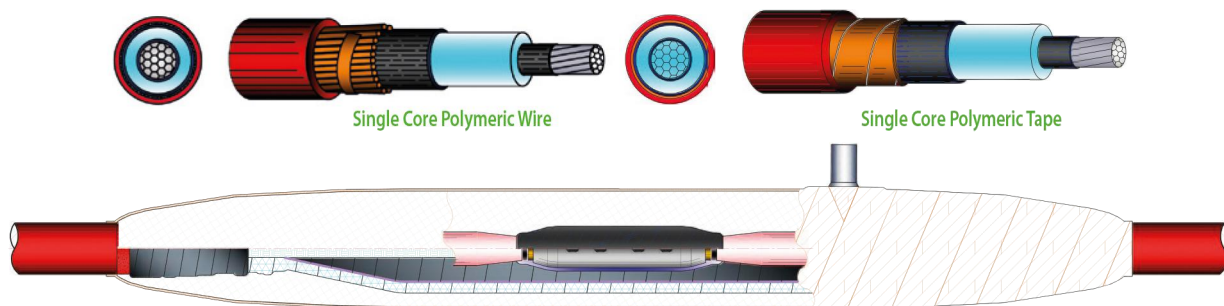

List of kits available for use with crimp connectors. Connectors not included

Famiglia Prodotti Type	Tensioni Voltage U ₀ /U/U _{max} [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	Lunghezza Length [mm]
EB GLS 60	3,6/6/7,2	50	EB GLS 0760 U 050 □ □	X	W & N	650
		95	EB GLS 0760 U 095 □ □	X	W & N	650
		150	EB GLS 0760 U 150 □ □	X	W & N	650
		240	EB GLS 0760 U 240 □ □	X	W & N	650
		300	EB GLS 0760 U 300 □ □	X	W & N	650
		400	EB GLS 0760 U 400 □ □	X	W & N	650
		630	EB GLS 0760 U 630 □ □	X	W & N	650
	6/10/12	50	EB GLS 1060 U 050 □ □	X	W & N	650
		95	EB GLS 1060 U 095 □ □	X	W & N	650
		150	EB GLS 1060 U 150 □ □	X	W & N	650
		240	EB GLS 1060 U 240 □ □	X	W & N	650
		300	EB GLS 1060 U 300 □ □	X	W & N	650
		400	EB GLS 1060 U 400 □ □	X	W & N	650
	8,7/15/17,5	50	EB GLS 1760 U 050 □ □	X	W & N	700
		95	EB GLS 1760 U 095 □ □	X	W & N	700
		150	EB GLS 1760 U 150 □ □	X	W & N	700
		240	EB GLS 1760 U 240 □ □	X	W & N	700
		300	EB GLS 1760 U 300 □ □	X	W & N	700
		400	EB GLS 1760 U 400 □ □	X	W & N	700
	12/20/24	50	EB GLS 2460 U 050 □ □	X	W & N	700
		95	EB GLS 2460 U 095 □ □	X	W & N	700
		150	EB GLS 2460 U 150 □ □	X	W & N	700
		240	EB GLS 2460 U 240 □ □	X	W & N	700
		300	EB GLS 2460 U 300 □ □	X	W & N	700
		400	EB GLS 2460 U 400 □ □	X	W & N	700
	18/30/36	50	EB GLS 3060 U 050 □ □	X	W & N	800
		95	EB GLS 3060 U 095 □ □	X	W & N	800
		150	EB GLS 3060 U 150 □ □	X	W & N	800
240		EB GLS 3060 U 240 □ □	X	W & N	800	
300		EB GLS 3060 U 300 □ □	X	W & N	800	
400		EB GLS 3060 U 400 □ □	X	W & N	800	
		630	EB GLS 3060 U 630 □ □	X	W & N	800