



HEAT SHRINKABLE TERMINATIONS for HV polymeric cable

HIGH VOLTAGE indoor termination for 1 core cable with wire or tape screen

The kit consists of stress control and anti-tracking heat shrinkable sleeves and rain sheds. Mastic ensures perfect sealing of the termination.

IEC 60840

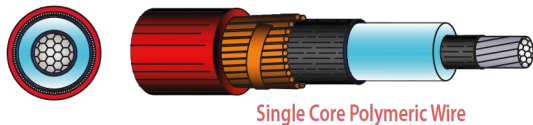

List of available kits suitable for crimp lugs. Lugs not included.



Famiglia Prodotti Type	Tensioni Voltage U ₀ /U/U _{max} [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	H [mm]	Campane/Fase Rain Sheds/Core
ET TIS 82	26/45/52	50	ET TIS 5282 U 050 □ □	X	W & N	700	4
		70/95	ET TIS 5282 U 095 □ □	X	W & N	700	4
		120/185	ET TIS 5282 U 185 □ □	X	W & N	700	4
		240/300	ET TIS 5282 U 300 □ □	X	W & N	700	4
		400	ET TIS 5282 U 400 □ □	X	W & N	700	4
		500	ET TIS 5282 U 500 □ □	X	W & N	700	4

HIGH VOLTAGE outdoor termination for 1 core cable with wire or tape screen

The kit consists of stress control and anti-tracking heat shrinkable sleeves and rain shed. Mastic ensures perfect sealing of the termination.

Compliant with standards

IEC 60840

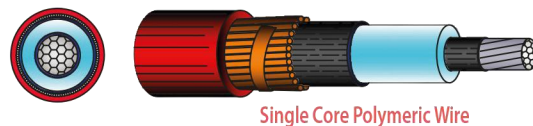

List of available kits suitable for crimp lugs. Lugs not included.

Famiglia Prodotti Type	Tensioni Voltage U ₀ /U/U _{max} [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	H [mm]	Campane/Fase Rain Sheds/Core
ET TES 84	26/45/52	50	ET TES 5284 U 050 □ □	X	W & N	900	7
		70/95	ET TES 5284 U 095 □ □	X	W & N	900	7
		120/185	ET TES 5284 U 185 □ □	X	W & N	900	7
		240/300	ET TES 5284 U 300 □ □	X	W & N	900	7
		400	ET TES 5284 U 400 □ □	X	W & N	900	7
		500	ET TES 5284 U 500 □ □	X	W & N	900	7