


# HEAT SHRINKABLE JOINTS for HV polymeric cables


## HIGH VOLTAGE joint for 1 core cable with wire or tape screen

The kit consists of stress control, insulating, double wall insulating-semiconducting, and adhesive lined protective heat shrink tubes. The hot-melt adhesive ensures the perfect sealing of the joint.

IEC 60840



Single Core Polymeric Wire

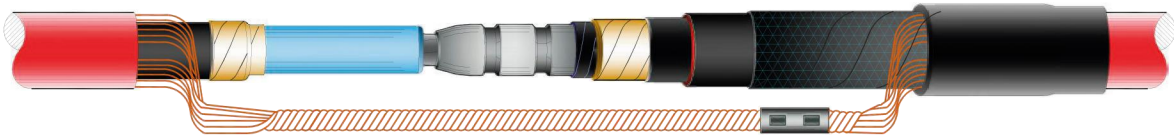

List of kits available for use with crimp connectors. Connectors not included.

Famiglia Prodotti Type	Tensioni Voltage U <sub>0</sub> /U/U <sub>max</sub> [kV]	Sezioni Cavi Cable Range [mm <sup>2</sup> ]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	Lunghezza Length [mm]
ET GLS 85	26/45/52	240	ET GLS 5285 U 240 □ □	X	W & N	1200
		300	ET GLS 5285 U 300 □ □	X	W & N	1200
		400	ET GLS 5285 U 400 □ □	X	W & N	1200