


## Heat Shrink Branch Joints for Polymeric Insulated Single Or Multi Core Cables

The kit consists of an heat shrink insulating tube for each phase and an adhesive lined tube for cable rejacketing. The hot-melt adhesive ensures the perfect sealing of the joint. The mechanical protection of armoured cable joints is provided by a joint case.

CENELEC HD 623, CEI EN 50393

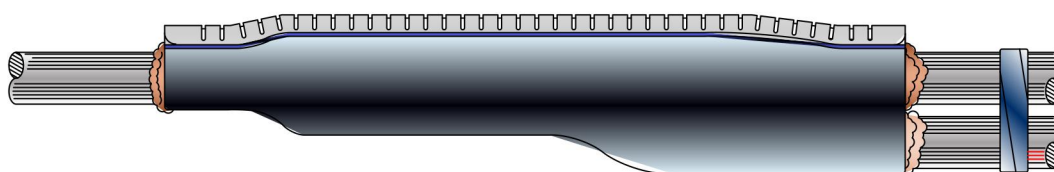

Tensioni/Voltage U <sub>0</sub> /U/U <sub>max</sub> (kV)	Sezioni cavi/Cable range (mm <sup>2</sup> )		Riferimento prodotto Ordering info	Lunghezza Length (mm)
	Passante/Main	Derivato/Branch		
0,6/1/1,2	1x4 ÷ 1x50	1x4 ÷ 1x50	<b>ET GDU 0110</b>	200
	1x120 ÷ 1x300	1x6 ÷ 1x300	<b>ET GDU 0111</b>	300
	4x1,5 ÷ 4x16	2x1,5 ÷ 4x2,5	<b>ET GDU 0112</b>	300
	4x25 ÷ 3x50+25	4x2,5 ÷ 4x25	<b>ET GDU 0113</b>	400