


Heat Shrink Subsea Pump Joints

The kit consists of four heat shrink tubes for the insulation of the connectors, a tube for the external protection, sealing mastics and four connectors. The hot-melt adhesive ensures the perfect sealing of the joint.

CENELEC HD 623, CEI EN 50393

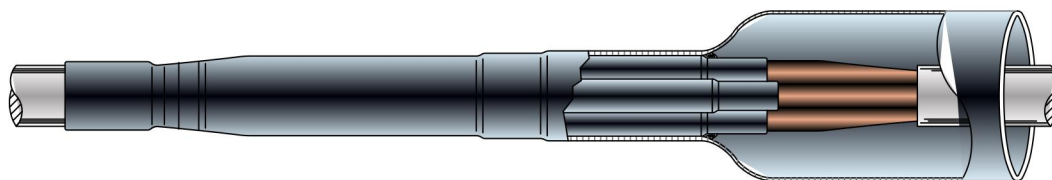

Tensioni/Voltage U ₀ /U/U _{max} (kV)	Sezioni cavi Cable range (mm ²)	Riferimento prodotto Ordering info	Lunghezza Lenght (mm)
0,6/1/1,2	4x1,5÷2,5	ET GLPS 0140	350
	4x4÷6	ET GLPS 0141	400
	4x10	ET GLPS 0142	400
	4x16	ET GLPS 0143	450