


## Heat shrink outdoor termination for polymeric 1 core insulated cable and sheath for mechanical protection.

The kit consist of stress control and anti-tracking heat shrinkable sleeves and rain shed. Mastic ensures perfect sealing of the termination.

Compliant with standards


CENELEC HD 629.1 S2, CEI 20-62/1



Single Core Polymeric Wire



Single Core Al Tube

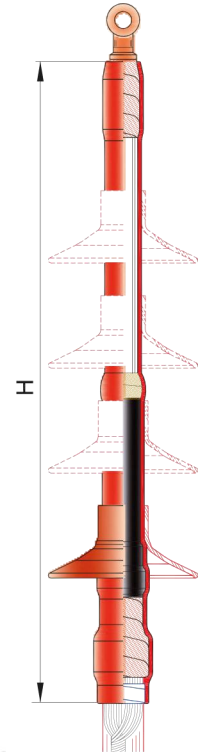

List of kits available for use with crimp and mechanical lugs. Lugs not included.

Famiglia Prodotti Type	Tensioni Voltage U <sub>0</sub> /U/U <sub>max</sub> [kV]	Sezioni Cavi Cable Range [mm <sup>2</sup> ]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	H [mm]	Campane/Fase Rain Sheds/Core
ET TES 75 AR	12/20/24	35/70	ET TES 2475AR M 070 □ □	X	W & A	450	3
		95/185	ET TES 2475AR M 185 □ □	X	W & A	450	3
		240/400	ET TES 2475AR M 400 □ □	X	W & A	500	3
		400/500	ET TES 2475AR M 500 □ □	X	W & A	500	3
	19/33/36	25/95	ET TES 3675AR M 095 □ □	X	W & A	550	4
		120/300	ET TES 3675AR M 300 □ □	X	W & A	550	4
		400/500	ET TES 3675AR M 500 □ □	X	W & A	600	4
		630	ET TES 3675AR M 630 □ □	X	W & A	600	4