


## Heat shrinkable joint for 1 core polymeric insulated cable with sheath for mechanical protection.

The kit consists of stress control, insulating, double wall insulating-semiconducting, and adhesive lined protective heat shrink tubes. The hot-melt adhesive ensures the perfect sealing of the joint.

Compliant with standards  
CENELEC HD 629.1 S2, CEI 20-62/1

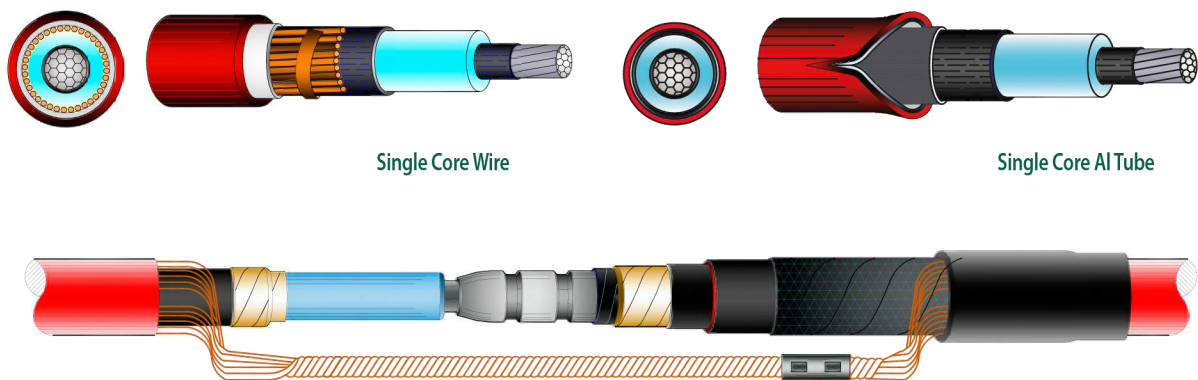

List of kits available for use with crimp and mechanical connectors. Connectors not included.

Famiglia Prodotti Type	Tensioni Voltage $U_0/U/U_{max}$ [kV]	Sezioni Cavi Cable Range [mm <sup>2</sup> ]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	Lunghezza massima Max Length [mm]
ET GLS 81AR	12/20/24	50/95	ET GLS 2481AR U 095 □ □	X	W & A	900
		120/185	ET GLS 2481AR U 185 □ □	X	W & A	900
		240/400	ET GLS 2481AR U 400 □ □	X	W & A	1000
		400/630	ET GLS 2481AR U 630 □ □	X	W & A	1000
	19/33/36	35/70	ET GLS 3681AR U 070 □ □	X	W & A	900
		95/185	ET GLS 3681AR U 185 □ □	X	W & A	1000
		240/400	ET GLS 3681AR U 400 □ □	X	W & A	1100
		400/630	ET GLS 3681AR U 630 □ □	X	W & A	1100