Heath shrink indoor termination for polymeric 1 core insulated cable and sheath for mechanical protection.

The kit consist of stress control and anti-tracking heat shrinkable sleeves as well as rain shed where indicated. Mastic ensures perfect sealing of the termination.

Compliant with standards
CENELEC HD 629.1 S2, CEI 20-62/1

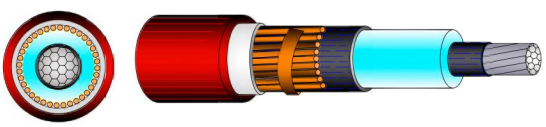

Single Core Polymeric Wire

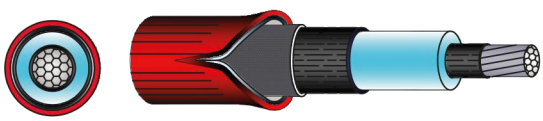

Single Core Al Tube

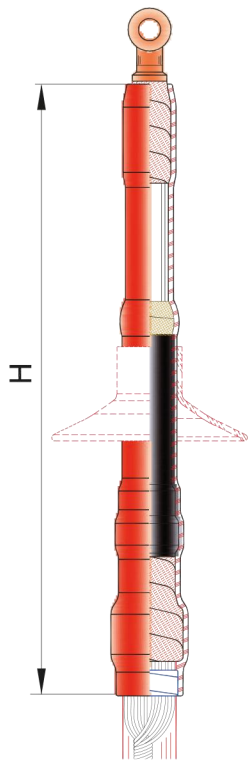

List of kits available for use with crimp and mechanical lugs. Lugs not included.

Famiglia Prodotti **Type**	Tensioni **Voltage** Uo/U/Umax [kV]	Sezioni Cavi **Cable Range** [mm²]	Rif. Ordine **Ordering Info**	Variante Armatura **Armouring**	Variante Schermo **Cable Shield**	**H** [mm]	Campane/Fase Rain Sheds/Core
ET TIS 73 AR	12/20/24	35/70	**ET TIS 2473AR M 070 □ □**	X	W & A	450	0
		95/185	**ET TIS 2473AR M 185 □ □**	X	W & A	450	0
		240/400	**ET TIS 2473AR M 400 □ □**	X	W & A	500	0
		400/500	**ET TIS 2473AR M 500 □ □**	X	W & A	500	0
	19/33/36	25/95	**ET TIS 3673AR M 095 □ □**	X	W & A	550	1
		120/300	**ET TIS 3673AR M 300 □ □**	X	W & A	550	1
		400/500	**ET TIS 3673AR M 500 □ □**	X	W & A	600	1
		630	**ET TIS 3673AR M 630 □ □**	X	W & A	600	1