
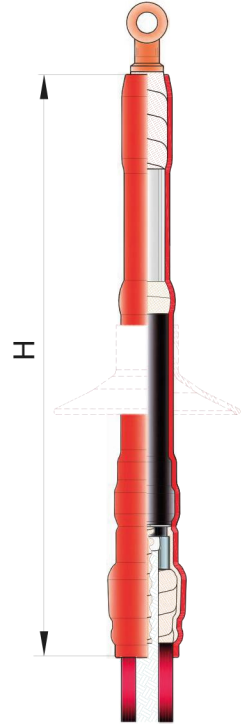


HEAT SHRINKABLE TERMINATIONS for MV polymeric cables

Indoor termination for 1 core cable with wire or Al tube screen

The kit consists of stress control and anti-tracking heat shrinkable sleeves as well as rain sheds where indicated. Mastic ensures perfect sealing of the termination.

Compliant with standards
CENELEC HD 629.1 S2, CEI 20-62/1

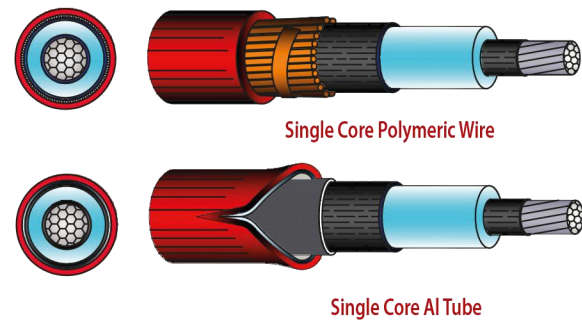

List of kits available for use with crimp and mechanical lugs. Lugs not included.

Famiglia Prodotti Type	Tensioni Voltage $U_0/U/U_{max}$ [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	H [mm]	Campane/Fase Rain Sheds/Core
ET TIS 73	12/20/24	35/70	ET TIS 2473 M 070 □ □	X	W & A	450	0
		95/185	ET TIS 2473 M 185 □ □	X	W & A	450	0
		240/400	ET TIS 2473 M 400 □ □	X	W & A	500	0
		400/500	ET TIS 2473 M 500 □ □	X	W & A	500	0
	19/33/36	25/95	ET TIS 3673 M 095 □ □	X	W & A	550	1
		120/300	ET TIS 3673 M 300 □ □	X	W & A	550	1
		400/500	ET TIS 3673 M 500 □ □	X	W & A	600	1
		630	ET TIS 3673 M 630 □ □	X	W & A	600	1