

HEAT SHRINKABLE TERMINATIONS for MV polymeric cables


Indoor termination for 1 core cable with wire screen

The kit consists of stress control and anti-tracking heat shrinkable sleeves as well as rain sheds where indicated. Mastic ensures perfect sealing of the termination.

Compliant with standards
CENELEC HD 629.1 S2, CEI 20-62/1



Single Core Polymeric Wire

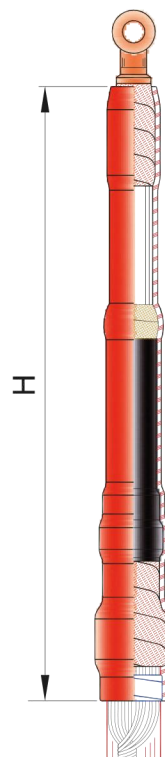

List of available kits suitable for crimp lugs. Lugs not included.

Famiglia Prodotti Type	Tensioni Voltage U ₀ /U/U _{max} [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	H [mm]	Campane/Fase Rain Sheds/Core
ETTIS 82	3,6/6/7,2	25/50	ET TIS 0782 M 050 □ □	X	W	300	0
		70/150	ET TIS 0782 M 150 □ □	X	W	300	0
		185/300	ET TIS 0782 M 300 □ □	X	W	300	0
		400/630	ET TIS 0782 M 630 □ □	X	W	300	0
	6,35/11/12	25/70	ET TIS 1282 M 070 □ □	X	W	350	0
		95/120	ET TIS 1282 M 120 □ □	X	W	350	0
		150/240	ET TIS 1282 M 240 □ □	X	W	350	0
		300/400	ET TIS 1282 M 400 □ □	X	W	350	0
		500/630	ET TIS 1282 M 630 □ □	X	W	350	0
	8,7/15/17,5	25/50	ET TIS 1782 M 050 □ □	X	W	350	0
		70/185	ET TIS 1782 M 185 □ □	X	W	350	0
		240/300	ET TIS 1782 M 300 □ □	X	W	350	0
		400/630	ET TIS 1782 M 630 □ □	X	W	350	0
	12/20/24	25/50	ET TIS 2482 M 050 □ □	X	W	400	0
		70/185	ET TIS 2482 M 185 □ □	X	W	400	0
		240/300	ET TIS 2482 M 300 □ □	X	W	400	0
		400/630	ET TIS 2482 M 630 □ □	X	W	400	0
	18/30/36	35/70	ET TIS 3082 M 070 □ □	X	W	500	0
		95/185	ET TIS 3082 M 185 □ □	X	W	500	0
		240/400	ET TIS 3082 M 400 □ □	X	W	500	0
500/630		ET TIS 3082 M 630 □ □	X	W	500	0	