


HEAT SHRINKABLE TERMINATIONS for MV paper insulated (PILC) cables


Indoor termination for 3 core (armoured or non armoured) BELTED (non-radial field) or SCREENED (radial field) cable

The kit consists of transparent oil barrier tube, stress control, anti-tracking, and semiconductive heat shrinkable sleeves, semiconductive breakout, and rain sheds where recommended. The use of self-bonding tape guarantees a perfect sealing of the termination.


Compliant with standards
CENELEC HD 629.2 S2, CEI 20-62/2

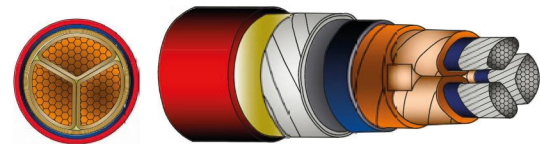

Three Core Belted Paper

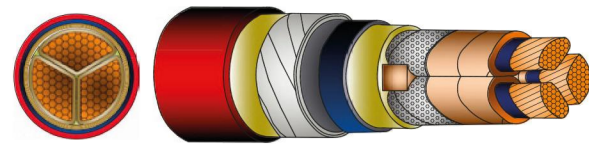

Three Core Screened Paper

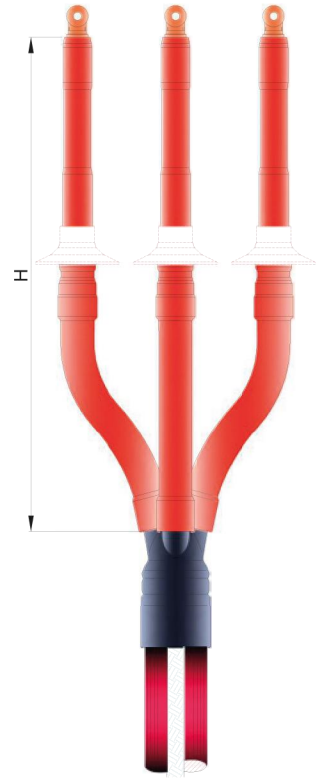

List of available kits suitable for crimp lugs. Lugs not included.

Famiglia Prodotti Type	Tensioni Voltage U ₀ /U/U _{max} [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	H [mm]	Campane/Fase Rain Sheds/Core
ETTIC 56	6,35/11/12	16/35	ET TIC 1256 T 035 □	X or Z	n.a.	450	0
		50/95	ET TIC 1256 T 095 □	X or Z	n.a.	450	0
		95/150	ET TIC 1256 T 150 □	X or Z	n.a.	450	0
	8,7/15/17,5	16	ET TIC 1756 T 016 □	X or Z	n.a.	550	1
		25/70	ET TIC 1756 T 070 □	X or Z	n.a.	550	1
		95/240	ET TIC 1756 T 240 □	X or Z	n.a.	550	1