
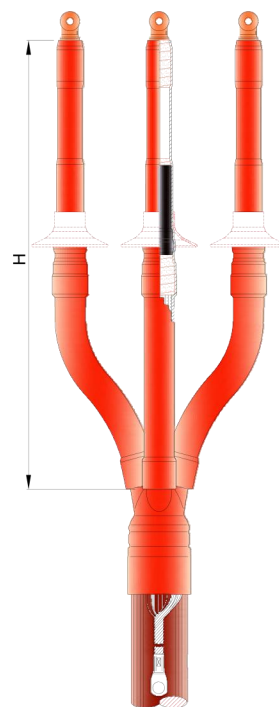


HEAT SHRINKABLE TERMINATIONS for MV polymeric cables

Indoor termination for 3 core (armoured or non armoured) cable with wire or tape screen

The kit consists of stress control and anti-tracking heat shrinkable sleeves as well as rain sheds where indicated. Mastic ensures perfect sealing of the termination. A 3-finger anti-tracking breakout is used for the sealing of the cores.

Compliant with standards
CENELEC HD 629.1 S2, CEI 20-62/1

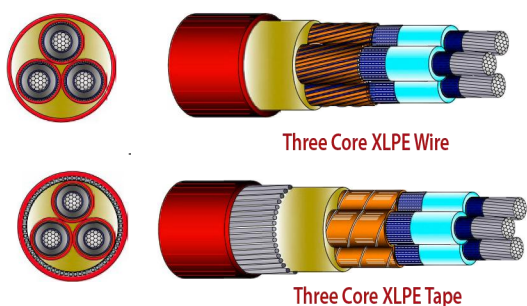

List available of kits suitable for crimp lugs. Lugs not included.

Famiglia Prodotti Type	Tensioni Voltage $U_0/U/U_{max}$ [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	H [mm]	Campane/Fase Rain Sheds/Core
ET TIS 82E	3,6/6/7,2	25/35	ET TIS 0782E T 035 □ □	X or Z	W & N	450	0
		50/70	ET TIS 0782E T 070 □ □	X or Z	W & N	450	0
		95/150	ET TIS 0782E T 150 □ □	X or Z	W & N	450	0
		185/300	ET TIS 0782E T 300 □ □	X or Z	W & N	450	0
		400/630	ET TIS 0782E T 630 □ □	X or Z	W & N	450	0
	6,35/11/12	25/35	ET TIS 1282E T 035 □ □	X or Z	W & N	650	0
		50/70	ET TIS 1282E T 070 □ □	X or Z	W & N	650	0
		95/150	ET TIS 1282E T 150 □ □	X or Z	W & N	650	0
		185/300	ET TIS 1282E T 300 □ □	X or Z	W & N	650	0
		400/630	ET TIS 1282E T 630 □ □	X or Z	W & N	650	0
	8,7/15/17,5	25/35	ET TIS 1782E T 035 □ □	X or Z	W & N	650	0
		50/70	ET TIS 1782E T 070 □ □	X or Z	W & N	650	0
		95/150	ET TIS 1782E T 150 □ □	X or Z	W & N	650	0
		185/300	ET TIS 1782E T 300 □ □	X or Z	W & N	650	0
		400/630	ET TIS 1782E T 630 □ □	X or Z	W & N	650	0
	12/20/24	25/35	ET TIS 2482E T 035 □ □	X or Z	W & N	650	0
		50/70	ET TIS 2482E T 070 □ □	X or Z	W & N	650	0
		95/150	ET TIS 2482E T 150 □ □	X or Z	W & N	650	0
		185/300	ET TIS 2482E T 300 □ □	X or Z	W & N	650	0
		400/630	ET TIS 2482E T 630 □ □	X or Z	W & N	650	0
19/33/36	25/35	ET TIS 3682E T 035 □ □	X or Z	W & N	850	1	
	50/70	ET TIS 3682E T 070 □ □	X or Z	W & N	850	1	
	95/150	ET TIS 3682E T 150 □ □	X or Z	W & N	850	1	
	185/300	ET TIS 3682E T 300 □ □	X or Z	W & N	850	1	
		400/500	ET TIS 3682E T 500 □ □	X or Z	W & N	850	1