




HEAT SHRINKABLE TERMINATIONS for MV polymeric cables


Indoor termination for application in highly polluted environment for 1 core cable with wire or tape screen

The kit consists of stress control and anti-tracking heat shrinkable sleeves and rain sheds. Mastic ensures perfect sealing of the termination.


Compliant with standards
CENELEC HD 629.1 S2, CEI 20-62/1



Single Core Polymeric Wire



Single Core Polymeric Tape

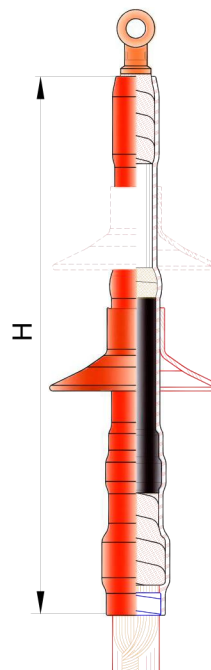

List of available kits suitable for crimp lugs. Lugs not included.

Famiglia Prodotti Type	Tensioni Voltage U ₀ /U/U _{max} [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	H [mm]	Campane/Fase Rain Sheds/Core
ET TIS 83E	3,6/6/7,2	25/35	ET TIS 0783E M 035 □ □	X	W & N	300	1
		50/70	ET TIS 0783E M 070 □ □	X	W & N	300	1
		95/150	ET TIS 0783E M 150 □ □	X	W & N	300	1
		185/300	ET TIS 0783E M 300 □ □	X	W & N	300	1
		400/630	ET TIS 0783E M 630 □ □	X	W & N	300	1
	6,35/11/12	25/35	ET TIS 1283E M 035 □ □	X	W & N	350	1
		50/70	ET TIS 1283E M 070 □ □	X	W & N	350	1
		95/150	ET TIS 1283E M 150 □ □	X	W & N	350	1
		185/300	ET TIS 1283E M 300 □ □	X	W & N	350	1
		400/630	ET TIS 1283E M 630 □ □	X	W & N	350	1
	8,7/15/17,5	25/35	ET TIS 1783E M 035 □ □	X	W & N	350	1
		50/70	ET TIS 1783E M 070 □ □	X	W & N	350	1
		95/150	ET TIS 1783E M 150 □ □	X	W & N	350	1
		185/300	ET TIS 1783E M 300 □ □	X	W & N	350	1
		400/630	ET TIS 1783E M 630 □ □	X	W & N	350	1
	12/20/24	25/35	ET TIS 2483E M 035 □ □	X	W & N	400	1
		50/70	ET TIS 2483E M 070 □ □	X	W & N	400	1
		95/150	ET TIS 2483E M 150 □ □	X	W & N	400	1
		185/300	ET TIS 2483E M 300 □ □	X	W & N	400	1
		400/630	ET TIS 2483E M 630 □ □	X	W & N	400	1
19/33/36	25/35	ET TIS 3683E M 035 □ □	X	W & N	500	2	
	50/70	ET TIS 3683E M 070 □ □	X	W & N	500	2	
	95/150	ET TIS 3683E M 150 □ □	X	W & N	500	2	
	185/300	ET TIS 3683E M 300 □ □	X	W & N	500	2	
	400/630	ET TIS 3683E M 630 □ □	X	W & N	500	2	