


HEAT SHRINKABLE TERMINATIONS for MV polymeric cables

Indoor termination for 1 core (armoured or non armoured) cable with wire or tape screen


The kit consists of stress control and anti-tracking heat shrinkable sleeves as well as rain sheds where indicated. Mastic ensures perfect sealing of the termination.

Compliant with standards


CENELEC HD 629.1 S2, CEI 20-62/1



Single Core Polymeric Wire



Single Core Polymeric Tape

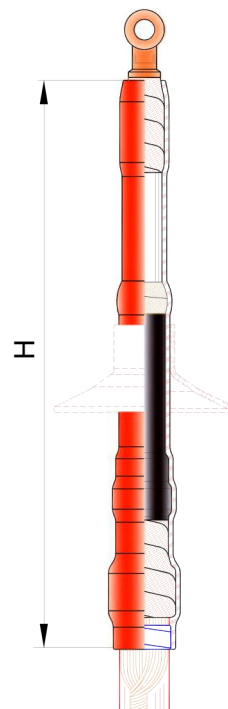

List of available kits suitable for non-armoured cables and crimp lugs. Lugs not included.

Famiglia Prodotti Type	Tensioni Voltage U ₀ /U/U _{max} [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	H [mm]	Campane/Fase Rain Sheds/Core
ET TIS 82E	3,6/6/7,2	25/35	ET TIS 0782E M 035 □ □	X or Z	W & N	300 or 400	0
		50/70	ET TIS 0782E M 070 □ □	X or Z	W & N	300 or 400	0
		95/150	ET TIS 0782E M 150 □ □	X or Z	W & N	300 or 400	0
		185/300	ET TIS 0782E M 300 □ □	X or Z	W & N	300 or 400	0
		400/630	ET TIS 0782E M 630 □ □	X or Z	W & N	350 or 450	0
	6,35/11/12	25/35	ET TIS 1282E M 035 □ □	X or Z	W & N	350 or 450	0
		50/70	ET TIS 1282E M 070 □ □	X or Z	W & N	350 or 450	0
		95/150	ET TIS 1282E M 150 □ □	X or Z	W & N	350 or 450	0
		185/300	ET TIS 1282E M 300 □ □	X or Z	W & N	350 or 450	0
		400/630	ET TIS 1282E M 630 □ □	X or Z	W & N	350 or 450	0
	8,7/15/17,5	25/35	ET TIS 1782E M 035 □ □	X or Z	W & N	350 or 450	0
		50/70	ET TIS 1782E M 070 □ □	X or Z	W & N	350 or 450	0
		95/150	ET TIS 1782E M 150 □ □	X or Z	W & N	350 or 450	0
		185/300	ET TIS 1782E M 300 □ □	X or Z	W & N	400 or 500	0
		400/630	ET TIS 1782E M 630 □ □	X or Z	W & N	400 or 500	0
	12/20/24	25/35	ET TIS 2482E M 035 □ □	X or Z	W & N	400 or 500	0
		50/70	ET TIS 2482E M 070 □ □	X or Z	W & N	400 or 500	0
		95/150	ET TIS 2482E M 150 □ □	X or Z	W & N	400 or 500	0
		185/300	ET TIS 2482E M 300 □ □	X or Z	W & N	400 or 500	0
		400/630	ET TIS 2482E M 630 □ □	X or Z	W & N	400 or 500	0
19/33/36	25/35	ET TIS 3682E M 035 □ □	X or Z	W & N	500 or 600	1	
	50/70	ET TIS 3682E M 070 □ □	X or Z	W & N	500 or 600	1	
	95/150	ET TIS 3682E M 150 □ □	X or Z	W & N	500 or 600	1	
	185/300	ET TIS 3682E M 300 □ □	X or Z	W & N	500 or 600	1	
	400/630	ET TIS 3682E M 630 □ □	X or Z	W & N	500 or 600	1	