



COLD SHRINKABLE TERMINATIONS for MV polymeric cable

Indoor termination for 1 core cable with wire or Al tube screen

The kit consists of stress control element, cold-shrink anti-tracking bodies as well as cold-shrink rain sheds where indicated.

Compliant with standards

CENELEC HD 629.1 S2, CEI 20-62/1

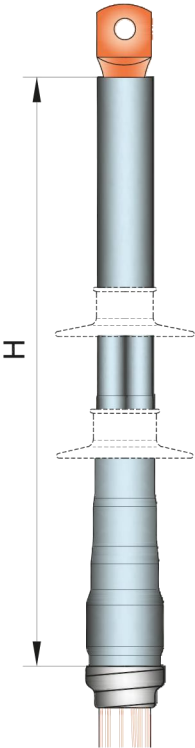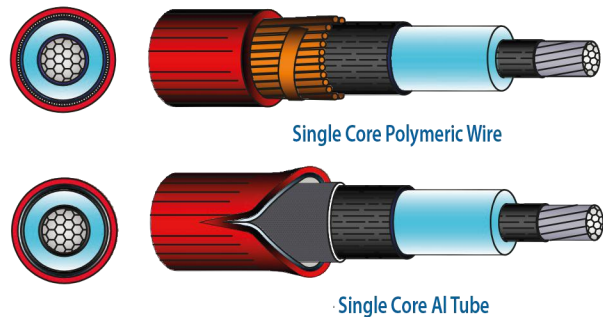

List of kits available for use with crimp and mechanical lugs. Lugs not included.

Famiglia Prodotti Type	Tensioni Voltage U ₀ /U/U _{max} [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	H [mm]	Campane/Fase Rain Sheds/Core
EC TIS 63	12/20/24	50/95	EC TIS 2463 M 095 □ □	X	W & A	400	0
		120/240	EC TIS 2463 M 240 □ □	X	W & A	400	0
		300/400	EC TIS 2463 M 400 □ □	X	W & A	450	0
		500/630	EC TIS 2463 M 630 □ □	X	W & A	450	0
	19/33/36	35/70	EC TIS 3663 M 070 □ □	X	W & A	700	2
		95/240	EC TIS 3663 M 240 □ □	X	W & A	700	2
		300/400	EC TIS 3663 M 400 □ □	X	W & A	750	2
		500/630	EC TIS 3663 M 630 □ □	X	W & A	750	2