

COLD SHRINKABLE JOINTS for MV polymeric insulated cables


Joint for 1 core cable with wire screen

The kit consists of a triple wall stress control-insulating-semiconducting cold-shrink body and of a protective body. The bodies are supplied assembled onto removable support.

CENELEC HD 629.1 S2, CEI 20-62/1



Single Core Polymeric Wire

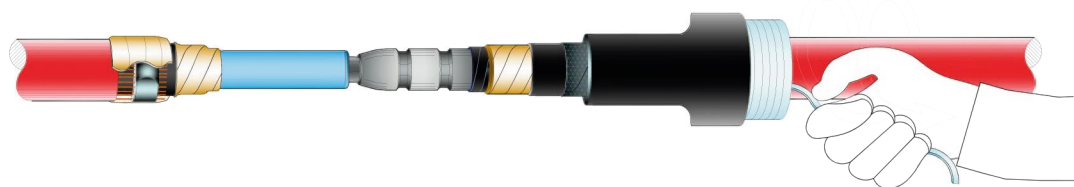

List of kits available for use with crimp connectors. Connectors not included.

Famiglia Prodotti Type	Tensioni Voltage U ₀ /U/U _{max} [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	Lunghezza Length [mm]
EC GLS 87	6,35/11/12	25/50	EC GLS 1287 U 050 □ □	X	W	650
		70/150	EC GLS 1287 U 150 □ □	X	W	650
		150/240	EC GLS 1287 U 240 □ □	X	W	650
		300/400	EC GLS 1287 U 400 □ □	X	W	700
	8,7/15/17,5	25/50	EC GLS 1787 U 050 □ □	X	W	650
		50/150	EC GLS 1787 U 150 □ □	X	W	650
		120/240	EC GLS 1787 U 240 □ □	X	W	650
		300/400	EC GLS 1787 U 400 □ □	X	W	700
	12/20/24	25/50	EC GLS 2487 U 050 □ □	X	W	650
		70/95	EC GLS 2487 U 095 □ □	X	W	700
		120/240	EC GLS 2487 U 240 □ □	X	W	700
		300/400	EC GLS 2487 U 400 □ □	X	W	700
	19/33/36	35/120	EC GLS 3687 U 120 □ □	X	W	700
		150/240	EC GLS 3687 U 240 □ □	X	W	700
		300/400	EC GLS 3687 U 400 □ □	X	W	700