


COLD SHRINKABLE JOINTS for MV polymeric insulated cables


Joint for 1 core cable with wire screen

The kit consists of a triple wall stress control-insulating-semiconducting cold-shrink body and of a protective body. The bodies are supplied assembled onto removable support.

Compliant with standards
CENELEC HD 629.1 S2, CEI 20-62/1



Single Core Polymeric Wire

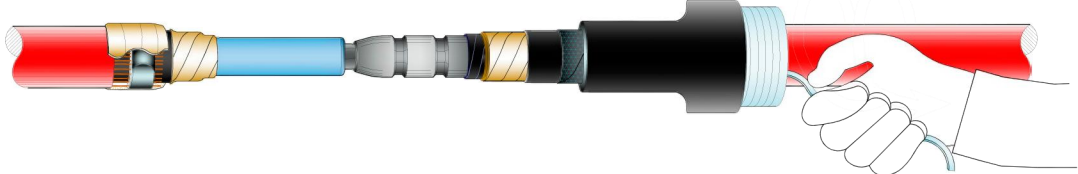

List of kits available for use with crimp connectors. Connectors not included.

Famiglia Prodotti Type	Tensioni Voltage U ₀ /U/U _{max} [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	Lunghezza Length [mm]
EC GLS 87E	6,35/11/12	35/70	EC GLS 1287E U 070 □ □	X	W	600
		95/150	EC GLS 1287E U 150 □ □	X	W	600
		185/240	EC GLS 1287E U 240 □ □	X	W	650
		300/400	EC GLS 1287E U 400 □ □	X	W	650
	8,7/15/17,5	35/70	EC GLS 1787E U 070 □ □	X	W	600
		95/150	EC GLS 1787E U 150 □ □	X	W	600
		185/240	EC GLS 1787E U 240 □ □	X	W	650
		300/400	EC GLS 1787E U 400 □ □	X	W	650
	12/20/24	25/50	EC GLS 2487E U 050 □ □	X	W	600
		70/95	EC GLS 2487E U 095 □ □	X	W	650
		95/185	EC GLS 2487E U 185 □ □	X	W	650
		120/240	EC GLS 2487E U 240 □ □	X	W	650
		300/400	EC GLS 2487E U 400 □ □	X	W	700
	19/33/36	35/70	EC GLS 3687E U 070 □ □	X	W	650
		95/150	EC GLS 3687E U 150 □ □	X	W	700
		185/300	EC GLS 3687E U 300 □ □	X	W	700
400		EC GLS 3687E U 400 □ □	X	W	700	