
COLD SHRINKABLE JOINTS for MV polymeric insulated cables

Joint for 3 core cable

The kit consists of a triple wall stress control-insulating-semiconducting cold-shrink body and of a protective body . The bodies are supplied assembled onto removable support. The mechanical protection of armoured cable is restored by a metallic joint case (canister).

CENELEC HD 629.1 S2, CEI 20-62/1

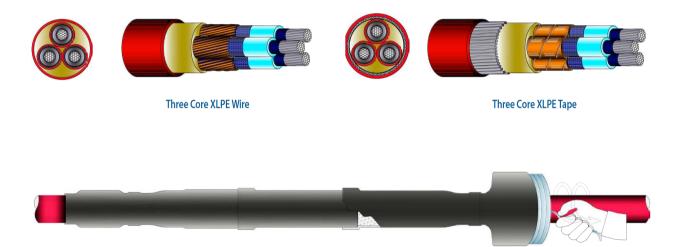

List of kits available for use with crimp connectors. Connectors not included

Famiglia Prodotti Type	Tensioni Voltage Uo/U/Umax [kV]	Sezioni Cavi Cable Range [mm²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	Lunghezza Length [mm]
EC GLS 75E	6,35/11/12	240	EC GLS 1275E T 240 □ □	Z	W & N	2000
		300	EC GLS 1275ET 300 🗆 🗆	Z	W & N	2000