


HEAT SHRINKABLE JOINTS for MV polymeric cables

Joint kit 1 core wire or Al tube screen

The kit consists of stress control, insulating, double wall insulating-semiconducting, and adhesive lined protective heat shrink tubes. The hot-melt adhesive ensures the perfect sealing of the joints.

Compliant with standards

CENELEC HD 629.1 S2, CEI 20-62/1

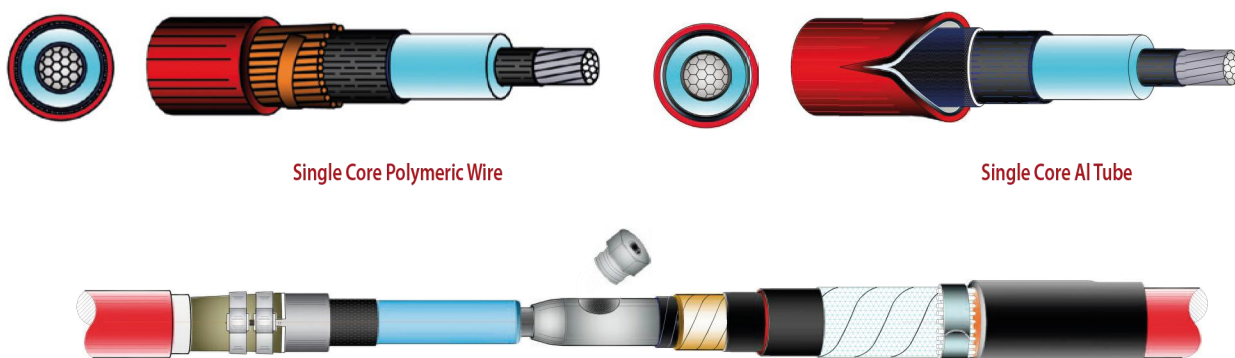

List of kits available for use with crimp and mechanical connectors. Connectors not included.

Famiglia Prodotti Type	Tensioni Voltage U ₀ /U/U _{max} [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	Lunghezza Length [mm]
ET GLS 81	12/20/24	50/185	ET GLS 2481 U 185 □ □	X	W & A	900
		185/300	ET GLS 2481 U 300 □ □	X	W & A	1000
		400/630	ET GLS 2481 U 630 □ □	X	W & A	1000
	19/33/36	50/240	ET GLS 3681 U 240 □ □	X	W & A	1000
		150/300	ET GLS 3681 U 300 □ □	X	W & A	1100
		400/630	ET GLS 3681 U 630 □ □	X	W & A	1100