


Cold shrinkable joint for 1 core polymeric insulated cable with wire or Al tube screen and polymeric sheath for mechanical protection.

The kit consists of a triple wall stress control-insulating-semiconducting cold-shrink body and of an outer protective body. The bodies are supplied assembled onto removable support.

CENELEC HD 629.1 S2, CEI 20-62/1

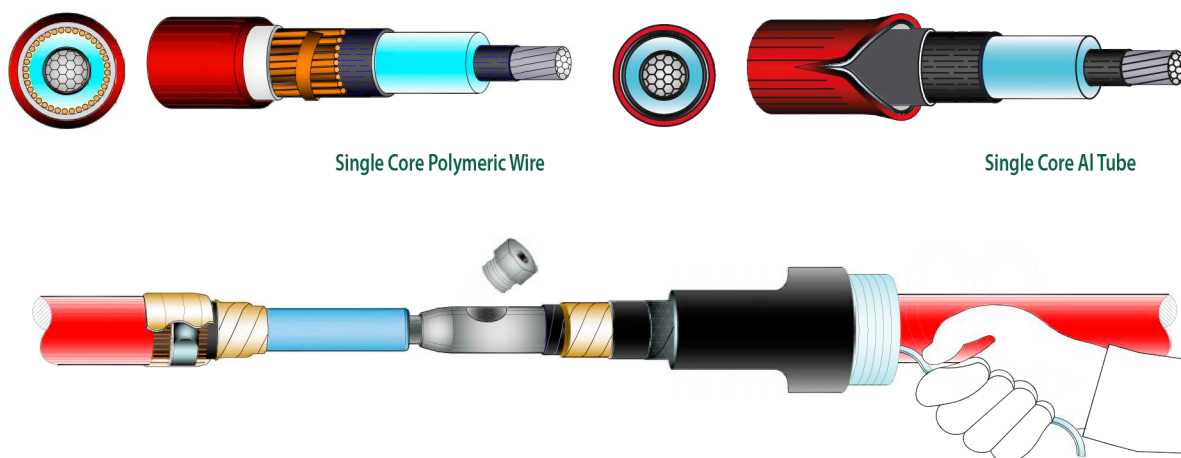

List of kits available for use with crimp and mechanical connectors. Connectors not included.

Famiglia Prodotti Type	Tensioni Voltage U ₀ /U/U _{max} [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	Lunghezza massima Max Length [mm]
EC GLS 89AR	12/20/24	50/70	EC GLS 2489AR U 070 □ □	X	W & A	700
		95/150	EC GLS 2489AR U 150 □ □	X	W & A	700
		185/300	EC GLS 2489AR U 300 □ □	X	W & A	750
		400/500	EC GLS 2489AR U 500 □ □	X	W & A	800
	19/33/36	50/70	EC GLS 3689AR U 070 □ □	X	W & A	700
		95/240	EC GLS 3689AR U 240 □ □	X	W & A	700
		300/400	EC GLS 3689AR U 400 □ □	X	W & A	750
		400/500	EC GLS 3689AR U 500 □ □	X	W & A	800