


HEAT SHRINKABLE JOINTS for MV paper insulated (PILC) cables

Joint kit for transition from either BELTED (non-radial field) or SCREENED (radial field) 3 core to three 1 core cables

The kit consists of heat shrink tubes, transparent oil barrier, stress control, insulating, double wall insulating-semiconducting, semiconducting sleeve and breakout. A perfect sealing of the joint is guaranteed by adhesive lined protective heat shrink tubes and breakout.

Compliant with standards
CENELEC HD 629.2 S2, CEI 20-62/2

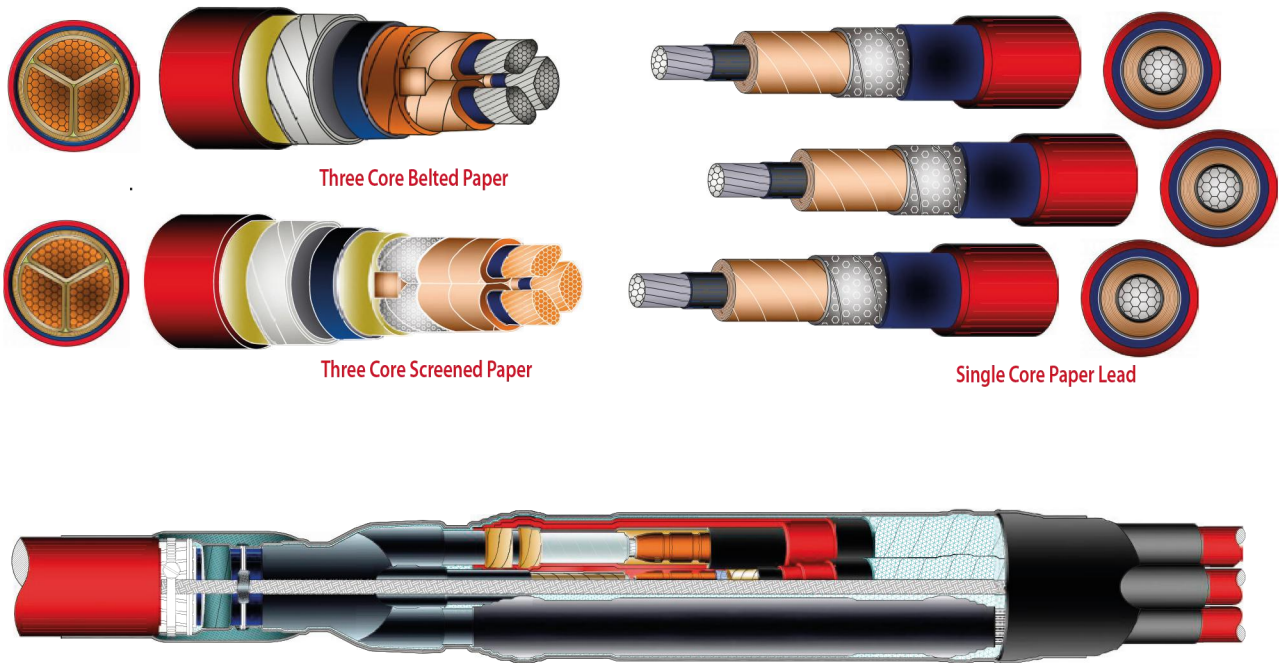

List of kits available for use with crimp connectors. Connectors not included.

Famiglia Prodotti Type	Tensioni Voltage U ₀ /U/U _{max} [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	Lunghezza Length [mm]
ET GLT 67	6,35/11/12	95/150	ET GLT 1267 T 150 □	X or Z	n.a.	1200
		25/185	ET GLT 1767 T 185 □	X or Z	n.a.	1200
	8,7/15/17,5	50/70	ET GLT 1767 T 070 □	X or Z	n.a.	1200
		50/240	ET GLT 1767 T 240 □	X or Z	n.a.	1200