
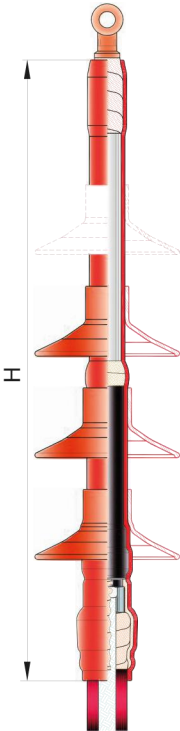


# HEAT SHRINKABLE TERMINATIONS for MV polymeric cables

## Outdoor termination for 1 core cable with wire or Al tube screen

The kit consists of stress control and anti-tracking heat shrinkable sleeves and rain sheds. Mastic ensures perfect sealing of the termination.

Compliant with standards  
CENELEC HD 629.1 S2, CEI 20-62/1

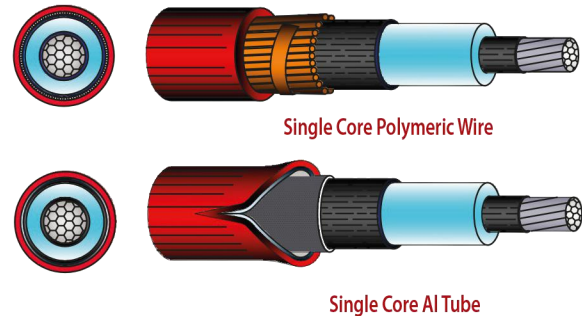

List of kits available for use with crimp and mechanical lugs. Lugs not included.

Famiglia Prodotti Type	Tensioni Voltage $U_0/U/U_{max}$ [kV]	Sezioni Cavi Cable Range [mm <sup>2</sup> ]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	H [mm]	Campane/Fase Rain Sheds/Core
ET TES 75	12/20/24	35/70	ET TES 2475 M 070 □ □	X	W & A	450	3
		95/185	ET TES 2475 M 185 □ □	X	W & A	450	3
		240/400	ET TES 2475 M 400 □ □	X	W & A	500	3
		400/500	ET TES 2475 M 500 □ □	X	W & A	500	3
	19/33/36	25/95	ET TES 3675 M 095 □ □	X	W & A	550	4
		120/300	ET TES 3675 M 300 □ □	X	W & A	550	4
		400/500	ET TES 3675 M 500 □ □	X	W & A	600	4
		630	ET TES 3675 M 630 □ □	X	W & A	600	4