


HEAT SHRINKABLE TERMINATIONS for MV polymeric cables


Outdoor termination for 1 core cable with wire screen

The kit consists of stress control and anti-tracking heat shrinkable sleeves and rain sheds. Mastic ensures perfect sealing of the termination.

Compliant with standards
CENELEC HD 629.1 S2, CEI 20-62/1



Single Core Polymeric Wire

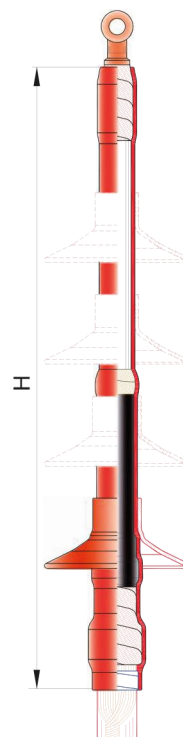

List of available kits suitable for crimp lugs. Lugs not included.

Famiglia Prodotti Type	Tensioni Voltage U ₀ /U/U _{max} [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	H [mm]	Campane/Fase Rain Sheds/Core
ET TES 84	3,6/6/7,2	25/50	ET TES 0784 M 050 □ □	X	W	300	1
		70/150	ET TES 0784 M 150 □ □	X	W	300	1
		185/300	ET TES 0784 M 300 □ □	X	W	300	1
		400/630	ET TES 0784 M 630 □ □	X	W	300	1
	6,35/11/12	25/70	ET TES 1284 M 070 □ □	X	W	350	2
		95/120	ET TES 1284 M 120 □ □	X	W	350	2
		150/240	ET TES 1284 M 240 □ □	X	W	350	2
		300/400	ET TES 1284 M 400 □ □	X	W	350	2
		500/630	ET TES 1284 M 630 □ □	X	W	350	2
	8,7/15/17,5	25/50	ET TES 1784 M 050 □ □	X	W	350	2
		70/185	ET TES 1784 M 185 □ □	X	W	350	2
		240/300	ET TES 1784 M 300 □ □	X	W	350	2
		400/630	ET TES 1784 M 630 □ □	X	W	350	2
	12/20/24	25/50	ET TES 2484 M 050 □ □	X	W	400	3
		70/185	ET TES 2484 M 185 □ □	X	W	400	3
		240/300	ET TES 2484 M 300 □ □	X	W	400	3
		400/630	ET TES 2484 M 630 □ □	X	W	400	3
	18/30/36	35/70	ET TES 3084 M 070 □ □	X	W	500	4
		95/185	ET TES 3084 M 185 □ □	X	W	500	4
		240/400	ET TES 3084 M 400 □ □	X	W	500	4
500/630		ET TES 3084 M 630 □ □	X	W	500	4	