

COLD SHRINKABLE TERMINATIONS for MV polymeric cable

Outdoor termination for 1 core cable with wire screen


The kit consists of stress control element, cold-shrink anti-tracking bodies and rain sheds.

Compliant with standards

CENELEC HD 629.1 S2, CEI 20-62/1



Single Core Polymeric Wire

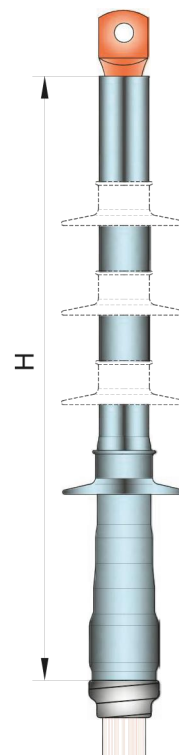

List of available kits suitable for crimp lugs. Lugs not included.

Famiglia Prodotti Type	Tensioni Voltage U ₀ /U/U _{max} [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	H [mm]	Campane/Fase Rain Sheds/Core
EC TES 72	3,6/6/7,2	25/35	EC TES 0772 M 035 □ □	X	W	300	1
		50/95	EC TES 0772 M 095 □ □	X	W	300	1
		120/240	EC TES 0772 M 240 □ □	X	W	300	1
		300	EC TES 0772 M 300 □ □	X	W	300	1
		400/500	EC TES 0772 M 500 □ □	X	W	300	1
	6,35/11/12	25/50	EC TES 1272 M 050 □ □	X	W	340	1
		70/185	EC TES 1272 M 185 □ □	X	W	340	1
		120/240	EC TES 1272 M 240 □ □	X	W	340	1
		300/630	EC TES 1272 M 630 □ □	X	W	340	1
	8,7/15/17,5	25/50	EC TES 1772 M 050 □ □	X	W	340	1
		50/185	EC TES 1772 M 185 □ □	X	W	340	1
		120/240	EC TES 1772 M 240 □ □	X	W	340	1
		300/630	EC TES 1772 M 630 □ □	X	W	340	1
	12/20/24	25/50	EC TES 2472 M 050 □ □	X	W	400	2
		35/70	EC TES 2472 M 070 □ □	X	W	400	2
		50/185	EC TES 2472 M 185 □ □	X	W	400	2
		70/150	EC TES 2472 M 150 □ □	X	W	400	2
		120/240	EC TES 2472 M 240 □ □	X	W	400	2
	19/33/36	300/630	EC TES 2472 M 630 □ □	X	W	400	2
		35/70	EC TES 3672 M 070 □ □	X	W	650	4
95/240		EC TES 3672 M 240 □ □	X	W	650	4	
		240/500	EC TES 3672 M 500 □ □	X	W	650	4