
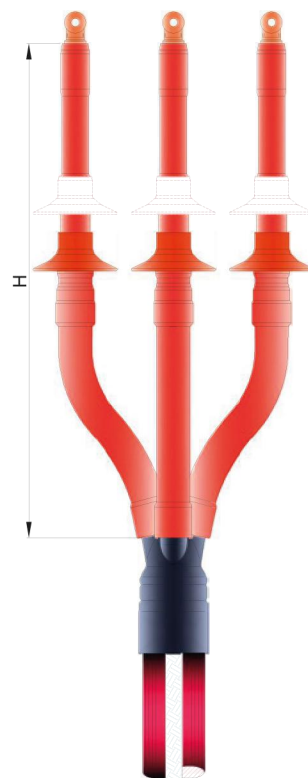


HEAT SHRINKABLE TERMINATIONS for MV paper insulated (PILC) cables

Outdoor termination for 3 core (armoured or non armoured) BELTED (non-radial field) or SCREENED (radial field) cable

The kit consists of transparent oil barrier tube, stress control, anti-tracking, and semiconductive heat shrinkable sleeves, semiconductive breakout, and rain sheds. The use of self-bonding tape guarantees a perfect sealing of the termination.

Compliant with standards
CENELEC HD 629.2 S2, CEI 20-62/2

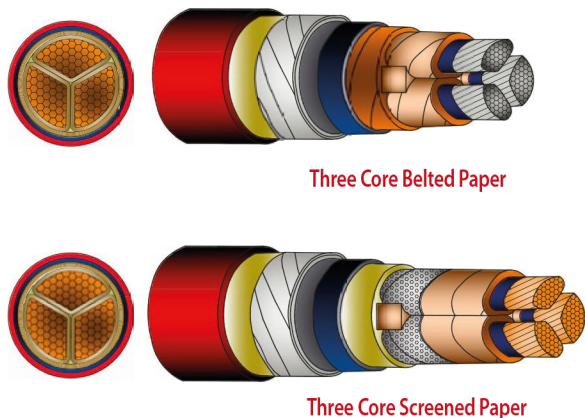

List of available kits suitable for crimp lugs. Lugs not included.

Famiglia Prodotti Type	Tensioni Voltage U ₀ /U/U _{max} [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	H [mm]	Campane/Fase Rain Sheds/Core
ET TEC 56	6,35/11/12	16/35	ET TEC 1256 T 035 □	X or Z	n.a.	550	1
		50/95	ET TEC 1256 T 095 □	X or Z	n.a.	550	1
		95/150	ET TEC 1256 T 150 □	X or Z	n.a.	550	1
	8,7/15/17,5	16	ET TEC 1756 T 016 □	X or Z	n.a.	550	2
		25/70	ET TEC 1756 T 070 □	X or Z	n.a.	550	2
		95/240	ET TEC 1756 T 240 □	X or Z	n.a.	550	2