
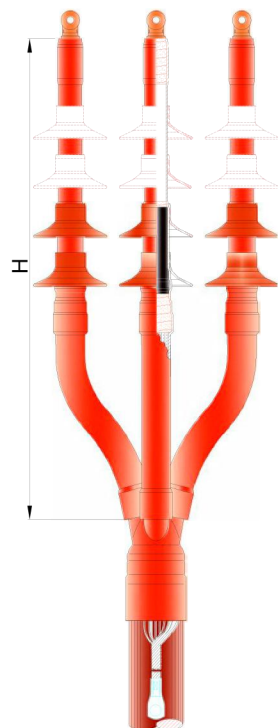


HEAT SHRINKABLE TERMINATIONS for MV polymeric cables

Outdoor termination for 3 core (armoured or non armoured) cable with wire or tape screen

The kit consists of stress control and anti-tracking heat shrinkable sleeves and rain sheds. Mastic ensures perfect sealing of the termination. A 3-finger anti-tracking breakout is used for the sealing of the cores.

Compliant with standards
CENELEC HD 629.1 S2, CEI 20-62/1

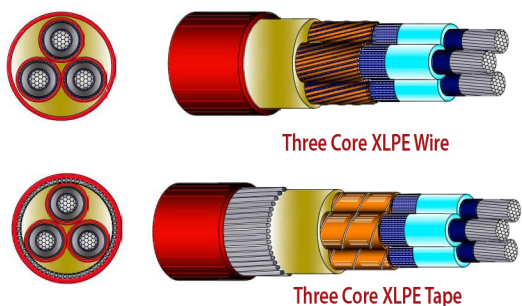

List of available kits suitable for crimp lugs. Lugs not included.

Famiglia Prodotti Type	Tensioni Voltage U ₀ /U/U _{max} [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	H [mm]	Campane/Fase Rain Sheds/Core
ET TES 84E	3,6/6/7,2	25/35	ET TES 0784E T 035 □ □	X or Z	W & N	650	2
		50/70	ET TES 0784E T 070 □ □	X or Z	W & N	650	2
		95/150	ET TES 0784E T 150 □ □	X or Z	W & N	650	2
		185/300	ET TES 0784E T 300 □ □	X or Z	W & N	650	2
		400/630	ET TES 0784E T 630 □ □	X or Z	W & N	650	2
	6,35/11/12	25/35	ET TES 1284E T 035 □ □	X or Z	W & N	850	2
		50/70	ET TES 1284E T 070 □ □	X or Z	W & N	850	2
		95/150	ET TES 1284E T 150 □ □	X or Z	W & N	850	2
		185/300	ET TES 1284E T 300 □ □	X or Z	W & N	850	2
		400/630	ET TES 1284E T 630 □ □	X or Z	W & N	850	2
	8,7/15/17,5	25/35	ET TES 1784E T 035 □ □	X or Z	W & N	850	2
		50/70	ET TES 1784E T 070 □ □	X or Z	W & N	850	2
		95/150	ET TES 1784E T 150 □ □	X or Z	W & N	850	2
		185/300	ET TES 1784E T 300 □ □	X or Z	W & N	850	2
		400/630	ET TES 1784E T 630 □ □	X or Z	W & N	850	2
	12/20/24	25/35	ET TES 2484E T 035 □ □	X or Z	W & N	850	3
		50/70	ET TES 2484E T 070 □ □	X or Z	W & N	850	3
		95/150	ET TES 2484E T 150 □ □	X or Z	W & N	850	3
		185/300	ET TES 2484E T 300 □ □	X or Z	W & N	850	3
		400/630	ET TES 2484E T 630 □ □	X or Z	W & N	850	3
19/33/36	25/35	ET TES 3684E T 035 □ □	X or Z	W & N	1200	4	
	50/70	ET TES 3684E T 070 □ □	X or Z	W & N	1200	4	
	95/150	ET TES 3684E T 150 □ □	X or Z	W & N	1200	4	
	185/300	ET TES 3684E T 300 □ □	X or Z	W & N	1200	4	
	400/630	ET TES 3684E T 630 □ □	X or Z	W & N	1200	4	