
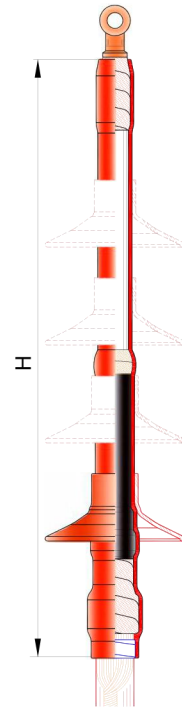


# HEAT SHRINKABLE TERMINATIONS for MV polymeric cables

## Outdoor termination for 1 core (armoured or non armoured) cable with wire or tape screen

The kit consists of stress control and anti-tracking heat shrinkable sleeves and rain sheds. Mastic ensures perfect sealing of the termination.

Compliant with standards  
CENELEC HD 629.1 S2, CEI 20-62/1

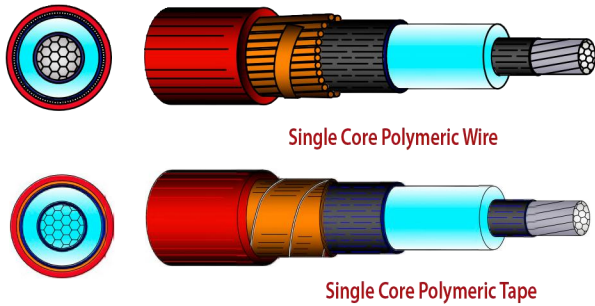

List of available kits suitable for non-armoured cables and crimp lugs. Lugs not included.

Famiglia Prodotti Type	Tensioni Voltage U <sub>0</sub> /U/U <sub>max</sub> [kV]	Sezioni Cavi Cable Range [mm <sup>2</sup> ]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	H [mm]	Campane/Fase Rain Sheds/Core
ET TES 84E	3,6/6/7,2	25/35	ET TES 0784E M 035 □ □	X or Z	W & N	300 or 400	1
		50/70	ET TES 0784E M 070 □ □	X or Z	W & N	300 or 400	1
		95/150	ET TES 0784E M 150 □ □	X or Z	W & N	300 or 400	1
		185/300	ET TES 0784E M 300 □ □	X or Z	W & N	300 or 400	1
		400/630	ET TES 0784E M 630 □ □	X or Z	W & N	300 or 400	1
	6,35/11/12	25/35	ET TES 1284E M 035 □ □	X or Z	W & N	350 or 450	2
		50/70	ET TES 1284E M 070 □ □	X or Z	W & N	350 or 450	2
		95/150	ET TES 1284E M 150 □ □	X or Z	W & N	350 or 450	2
		185/300	ET TES 1284E M 300 □ □	X or Z	W & N	350 or 450	2
		400/630	ET TES 1284E M 630 □ □	X or Z	W & N	350 or 450	2
	8,7/15/17,5	25/35	ET TES 1784E M 035 □ □	X or Z	W & N	350 or 450	2
		50/70	ET TES 1784E M 070 □ □	X or Z	W & N	350 or 450	2
		95/150	ET TES 1784E M 150 □ □	X or Z	W & N	350 or 450	2
		185/300	ET TES 1784E M 300 □ □	X or Z	W & N	350 or 450	2
		400/630	ET TES 1784E M 630 □ □	X or Z	W & N	350 or 450	2
	12/20/24	25/35	ET TES 2484E M 035 □ □	X or Z	W & N	400 or 500	3
		50/70	ET TES 2484E M 070 □ □	X or Z	W & N	400 or 500	3
		95/150	ET TES 2484E M 150 □ □	X or Z	W & N	400 or 500	3
		185/300	ET TES 2484E M 300 □ □	X or Z	W & N	400 or 500	3
		400/630	ET TES 2484E M 630 □ □	X or Z	W & N	400 or 500	3
19/33/36	25/35	ET TES 3684E M 035 □ □	X or Z	W & N	500 or 600	4	
	50/70	ET TES 3684E M 070 □ □	X or Z	W & N	500 or 600	4	
	95/150	ET TES 3684E M 150 □ □	X or Z	W & N	500 or 600	4	
	185/300	ET TES 3684E M 300 □ □	X or Z	W & N	500 or 600	4	
	400/630	ET TES 3684E M 630 □ □	X or Z	W & N	500 or 600	4	