


Re-Enterable Resin Joints for Polymeric or Paper Insulated Single or Multi Core Cables

The kit consists of a robust and easy to assemble housing, of a re-enterable room curing polyurethane resin. The joint provides both mechanical protection and a perfect sealing.

Compliant with standards
CENELEC HD 623, CEI EN 50393

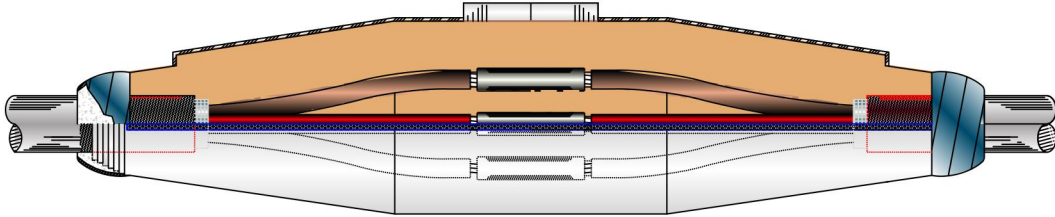

straight joint

List of available kits for non-armored cables

Tensioni Voltage U ₀ /U/U _{max} (kV)	Diametro ingresso cavi Diameter cable entry (mm)	Sezioni massime alloggiabili Max. cable section (mm ²)				Riferimento prodotto Ordering info	Lunghezza Length (mm)	Diametro Diameter (mm)
0,6/1/1,2	10÷18	1x70	2x10	3x10	4x10	ES GLR 0114	180	70
	14÷26	1x150	2x25	3x25	4x25	ES GLR 0115	276	85
	28÷40	1x400	2x95	3x70	4x50	ES GLR 0116	370	110
	30÷52	1x630	2x185	3x150	4x150	ES GLR 0117	480	130
	50÷72	1x630	2x300	3x300	4x300	ES GLR 0118	650	150