


Re-Enterable Straight or Branch Gel Joints for Polymeric Insulated Cables

Double insulation joint IP rating 68. The robust and snap-to-close housing is made of self-extinguishing material. The gel provides both insulation and sealing. An adjustable mechanical clamping system is included to ensure a stable and secure installation.

Compliant with standards

CENELEC HD 623, CEI EN 50393

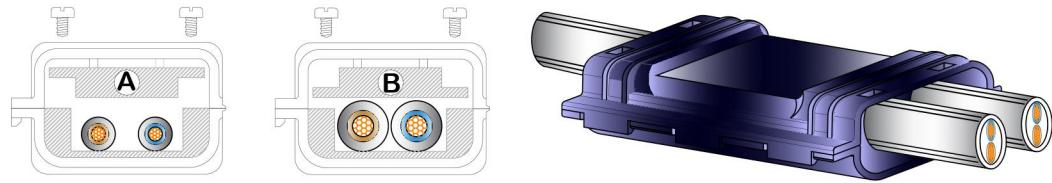

Tensioni Voltage Uo/U/Umax (kV)	Sezioni cavi/Cable range (mm²)			Riferimento prodotto Ordering info	
	Giunzione diritta Straight joint	Giunzione derivata/Branch joint			
		Passante/Main	Derivato/Branch		
0,6/1/1,2	1x1,5 ÷ 1x50	1x1,5 ÷ 1x50	1x1,5 ÷ 1x35	ELCOGEL 50	
	1x10 ÷ 1x120	1x6 ÷ 1x70	1x5 ÷ 1x35	ELCOGEL 120	
	2x1,5 ÷ 2x16	2x1,5 ÷ 2x10	2x1,5 ÷ 2x6		
	4x1,5 ÷ 4x6	4x1,5 ÷ 4x6	4x1,5 ÷ 4x4		
	1x35 ÷ 1x185	1x25 ÷ 1x150	1x10 ÷ 1x120	ELCOGEL 185	
	2x16 ÷ 2x50	2x10 ÷ 2x35	2x1,5 ÷ 2x25		
	4x6 ÷ 4x25	4x6 ÷ 4x25	4x1,5 ÷ 4x16		