


Resin Straight Joint for Polymeric Insulated Signal Cables

The kit consists of a robust and easy to assemble housing, of a room curing polyurethane resin. The joint provides both mechanical protection and perfect sealing.

F.S. N° 11098 30.5.1986

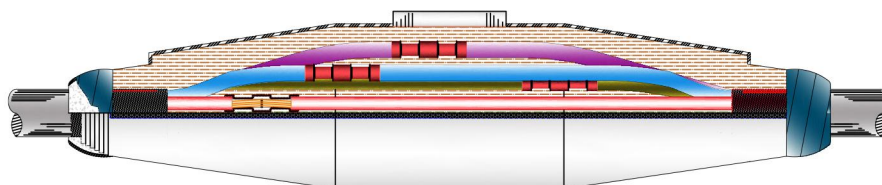

Diametro ingresso cavi Diameter cable entry (mm)	Sezioni massime alloggiabili / Max. cable section (mm ²)				Riferimento prodotto Ordering info	Lunghezza Length (mm)	Diametro Diameter (mm)
	1 mm ²	1,5 mm ²	2,5 mm ²	4 mm ²			
10÷18	7x	5x	5x	-	ELCOSIGNAL GLS 0114	180	70
14÷26	16x	14x	12x	10x	ELCOSIGNAL GLS 0115	276	85
28÷40	37x	30x	24x	16x	ELCOSIGNAL GLS 0116	370	110
30÷52	48x	48x	37x	30x	ELCOSIGNAL GLS 0117	480	130
50÷72	-	-	48x	48x	ELCOSIGNAL GLS 0118	650	150