


# COLD SHRINKABLE JOINTS for SPECIAL APPLICATIONS on MV cables

## Transition joint for 1 core PILC cable to 1 core polymeric cable

The kit consists of a triple wall stress control-insulating-semiconducting cold-shrink body and of a protective body. The bodies are supplied assembled onto removable support.

CENELEC HD 629.2 S2, CEI 20-62/2

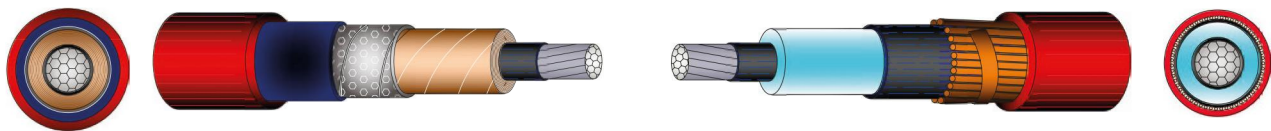

Single Core Polymeric Wire

Single Core Paper Lead



List of kits available for use with crimp connectors. Connectors not included.

Famiglia Prodotti Type	Tensioni Voltage U <sub>0</sub> /U/U <sub>max</sub> [kV]	Sezioni Cavi Cable Range [mm <sup>2</sup> ]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	Lunghezza Length [mm]
EC GLM 88	12/20/24	70/240	EC GLM 2488 U 240 □ □	X	W	800