


HEAT SHRINKABLE JOINTS for SPECIAL APPLICATIONS on MV cables

Transition joint for 3 core PILC BELTED (non-radial field) or SCREENED (radial field) cable to 3 core polymeric insulated cable

The kit consists of heat shrink transparent oil barrier, stress control, insulating, double wall insulating-semiconducting sleeves, semiconducting sleeve and breakout, and adhesive lined protective heat shrink tubes. The hot-melt adhesive ensures the perfect sealing of the joint.

Compliant with standards
CENELEC HD 629.1 S2, CEI 20-62/1

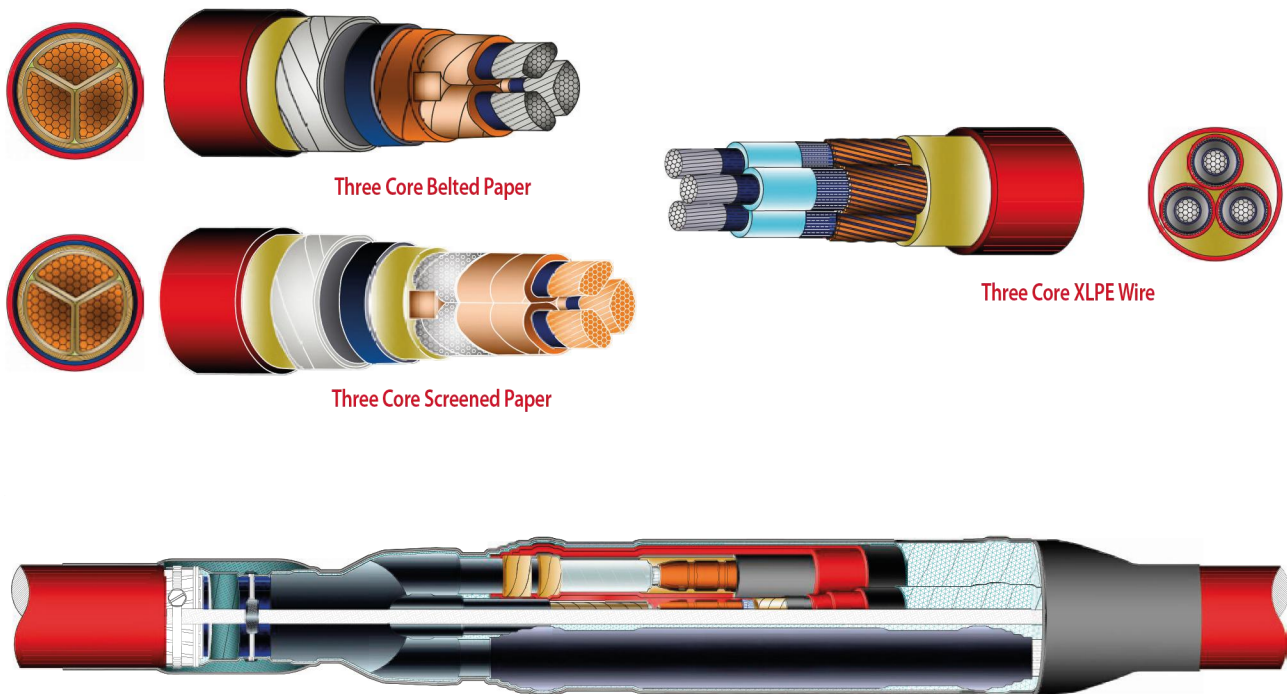

List of kits available for use with crimp connectors. Connectors not included.

Famiglia Prodotti Type	Tensioni Voltage U_0/U_{max} [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	Lunghezza Length [mm]
ET GLM 75	6,35/11/12	25/35	ET GLM 1275 T 035 □ □	X or Z	W	1200
	8,7/15/17,5	16/70	ET GLM 1275 T 070 □ □	X or Z	W	1500
		95/240	ET GLM 1275 T 240 □ □	X or Z	W	1700