


# HEAT SHRINKABLE JOINTS for SPECIAL APPLICATIONS on MV cables

## Transition joint for 3 core PILC BELTED (non-radial field) or SCREENED (radial field) cable to three 1 core polymeric insulated cable

The kit consists of transparent oil barrier, stress control, insulating, double wall insulating-semiconducting, semiconducting sleeve and breakout, and adhesive lined protective heat shrink tubes and breakout. The hot-melt adhesive ensures the perfect sealing of the joint.

Compliant with standards  
CENELEC HD 629.2 S2, CEI 20-62/2

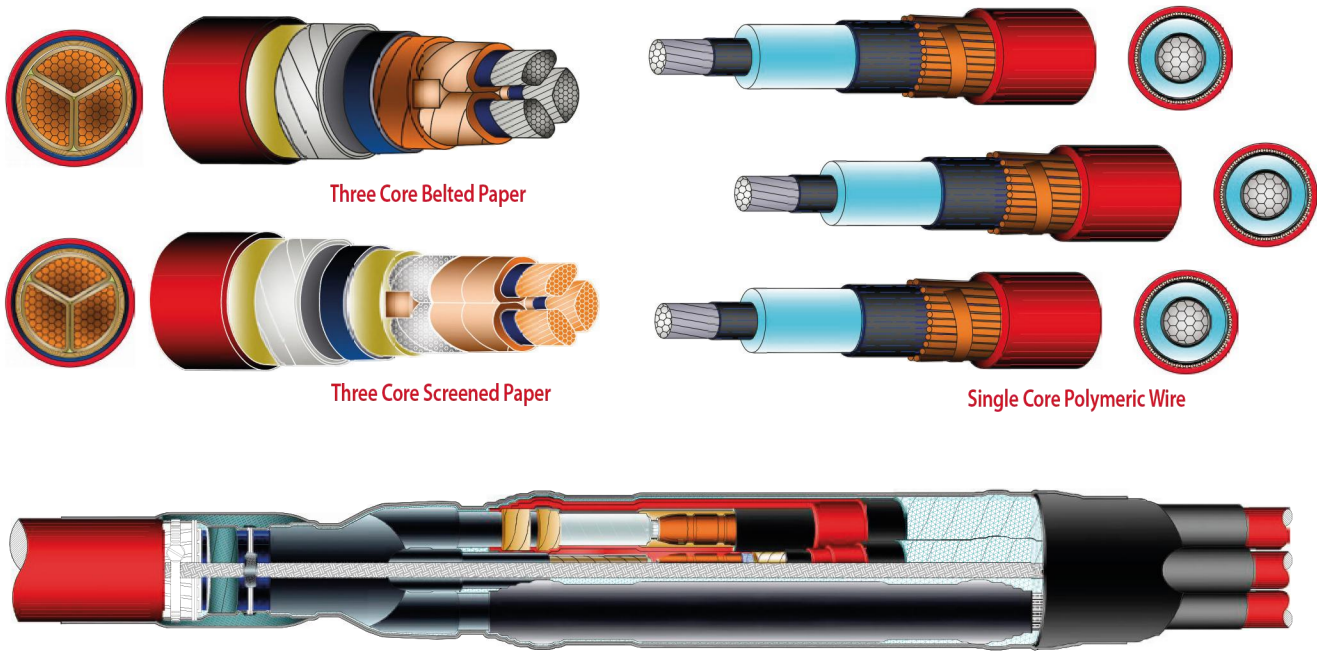

List of kits available for use with crimp connectors. Connectors not included

Famiglia Prodotti Type	Tensioni Voltage U <sub>0</sub> /U/U <sub>max</sub> [kV]	Sezioni Cavi Cable Range [mm <sup>2</sup> ]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	Lunghezza Length [mm]
ET GLM 66	6,35/11/12	150/185	ET GLM 1266 T 185 □ □	X	W	1100
	8,7/15/17,5	16/35	ET GLM 1766 T 035 □ □	X	W	1000
		50/240	ET GLM 1766 T 240 □ □	X	W	1100
		185/300	ET GLM 1766 T 300 □ □	X	W	1100
		300/400	ET GLM 1766 T 400 □ □	X	W	1200
	12/20/24	50/240	ET GLM 2466 T 240 □ □	X	W	1200
	19/33/36	50/240	ET GLM 3666 T 240 □ □	X	W	1300