


HEAT SHRINKABLE JOINTS for SPECIAL APPLICATIONS on MV cables

Transition joint for 3 core PILC BELTED (non-radial field) or SCREENED (radial field) cable to 3 core polymeric insulated cable

The kit consists of transparent oil barrier, stress control, insulating, double wall insulating-semiconducting heat shrink tubes, semiconducting sleeve and breakout, and adhesive lined protective heat shrink tubes. The hot-melt adhesive ensures the perfect sealing of the joint. The mechanical protection is restored by a metallic joint case (canister).

Compliant with standards

CENELEC HD 629.2 S2, CEI 20-62/2

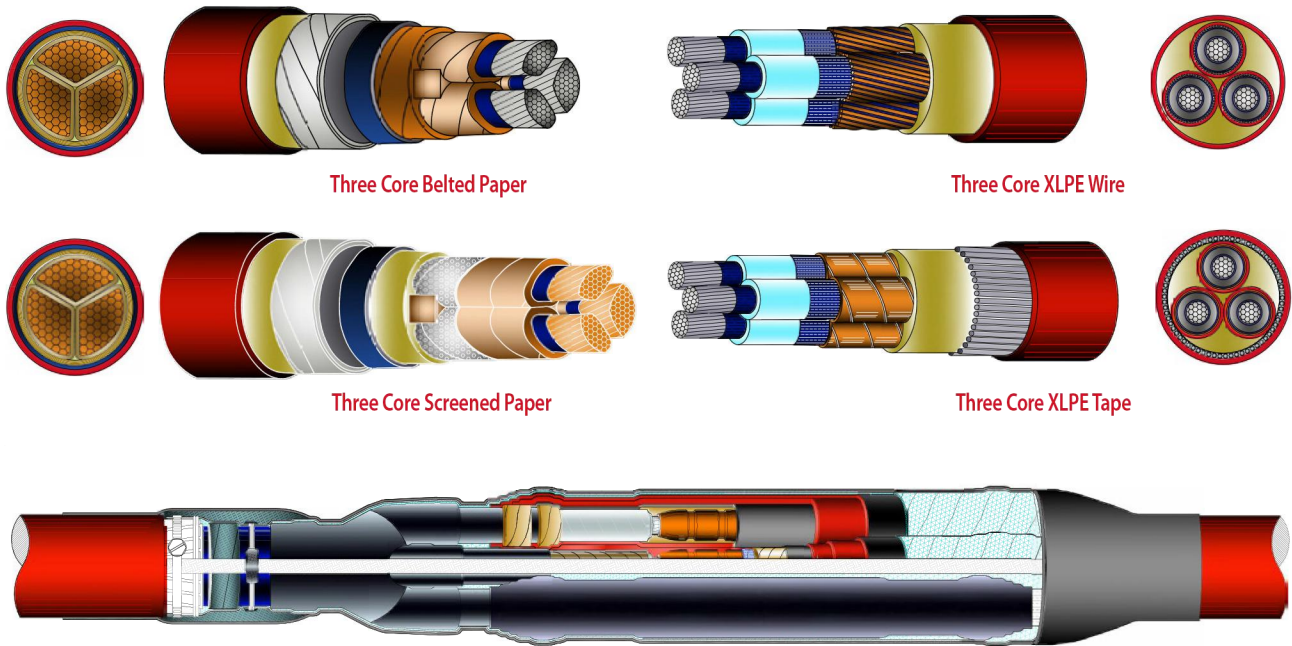

List of kits available for use with crimp connectors. Connectors not included.

Famiglia Prodotti Type	Tensioni Voltage $U_0/U/U_{max}$ [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	Lunghezza Length [mm]
ET GLM 75E	6,35/11/12	70/95	ET GLM 1275E T 095 □ □	Z	W & N	1700
		120/185	ET GLM 1275E T 185 □ □	Z	W & N	1900
	8,7/15/17,5	95/240	ET GLM 1775E T 240 □ □	Z	W & N	1700
		400	ET GLM 1775E T 400 □ □	Z	W & N	2100