


HEAT SHRINKABLE JOINTS for SPECIAL APPLICATIONS on MV cables

Transition joint for 3 core PILC BELTED (non-radial field) or SCREENED (radial field) cable to three 1 core polymeric insulated cable

The kit consists of transparent oil barrier, stress control, insulating, double wall insulating-semiconducting heat shrink tubes, semiconducting sleeve and breakout, and adhesive lined protective heat shrink tubes and breakout. The hot-melt adhesive ensures the perfect sealing of the joint.

Compliant with standards
CENELEC HD 629.2 S2, CEI 20-62/2

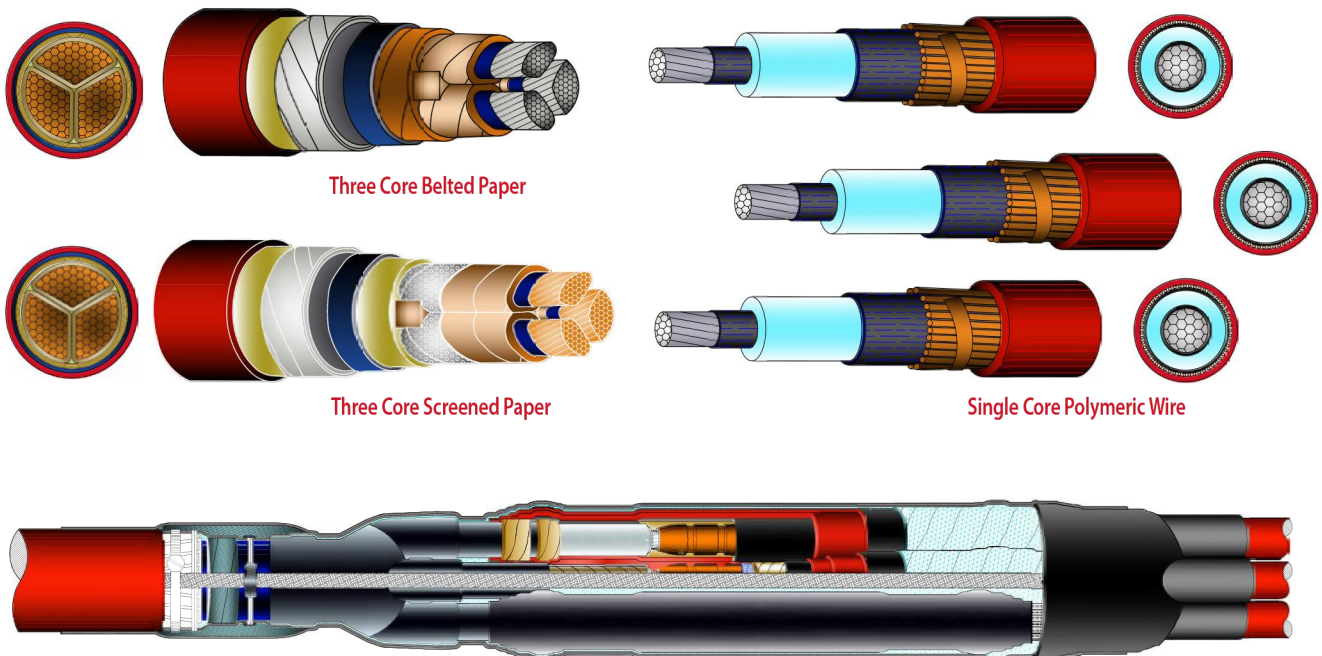

List of kits available for use with crimp connectors. Connectors not included

Famiglia Prodotti Type	Tensioni Voltage U_0/U_{max} [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	Lunghezza Length [mm]
ET GLM 66E	8,7/15/17,5	35/95	ET GLM 1766ET 095 □ □	X or Z	W & N	1200
		95/240	ET GLM 1766ET 240 □ □	X or Z	W & N	1200
	12/20/24	25/50	ET GLM 1766ET 050 □ □	X or Z	W & N	1200
		70/240	ET GLM 1766ET 240 □ □	X or Z	W & N	1200