
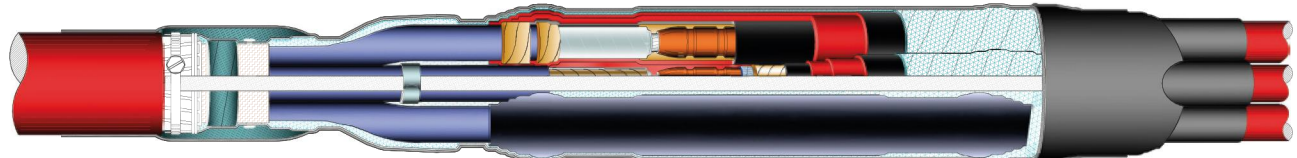


HEAT SHRINKABLE JOINTS for SPECIAL APPLICATIONS on MV cables

Transition joint for 3 core PILC SEPARATE-LEAD-SHEATH (radial field) cable to three 1 core polymeric insulated cables

The kit consists of transparent oil barrier, stress control, insulating, double wall insulating-semiconducting tubes, and adhesive lined protective heat shrink tubes and breakout. The hot-melt adhesive ensures the perfect sealing of the joint.

Compliant with standards
CENELEC HD 629.2 S2, CEI 20-62/2

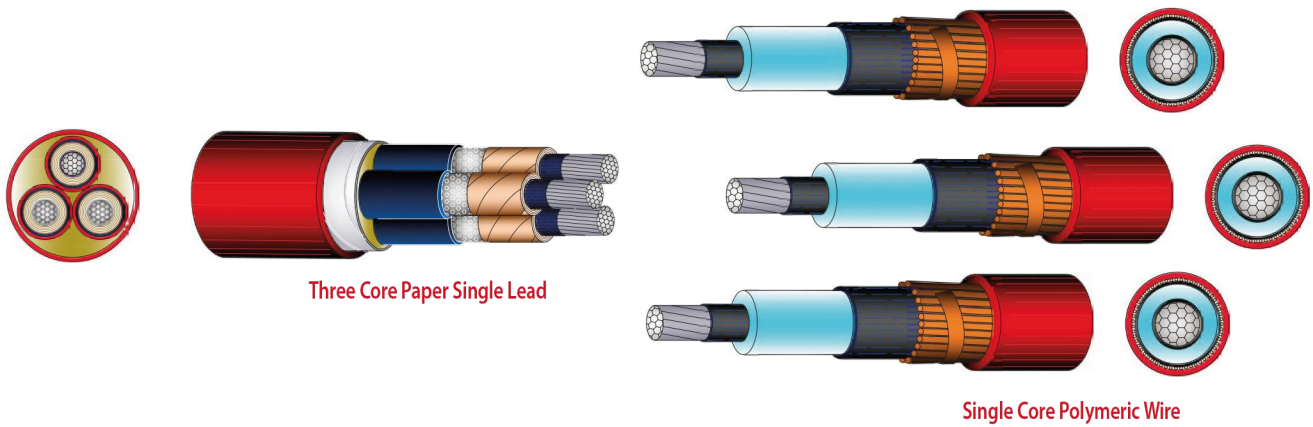

List of kits available for use with crimp connectors. Connectors not included

Famiglia Prodotti Type	Tensioni Voltage $U_0/U/U_{max}$ [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	Lunghezza Length [mm]
ET GLM 63	12/20/24	25/50	ET GLM 2463 T 050 □ □	X or Z	W	700
		50/240	ET GLM 2463 T 240 □ □	X or Z	W	800
	19/33/36	95/240	ET GLM 3663 T 240 □ □	X or Z	W	900