


HEAT SHRINKABLE JOINTS for SPECIAL APPLICATIONS on MV cables

Transition joint for 3 core PILC SEPARATE-LEAD-SHEATH (radial field) cable to 3 core polymeric insulated cable

The kit consists of transparent oil barrier, stress control, insulating, double wall insulating-semiconducting, and adhesive lined protective heat shrink tubes. The hot-melt adhesive ensures the perfect sealing of the joint. The mechanical protection is restored by a metallic joint case (canister).

Compliant with standards
CENELEC HD 629.2 S2, CEI 20-62/2

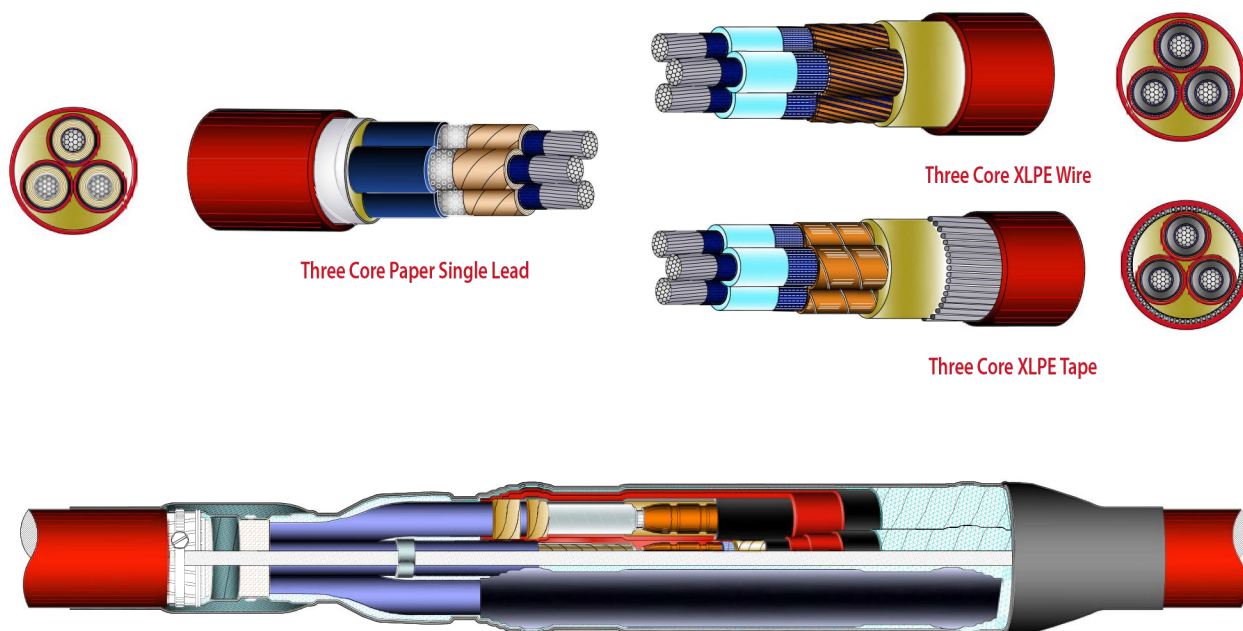

List of kits available for use with crimp connectors. Connectors not included

Famiglia Prodotti Type	Tensioni Voltage U ₀ /U/U _{max} [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	Lunghezza Length [mm]
ET GLM 76E	19/33/36	50/95	ET GLM 3676E T 095 □ □	Z	W & N	2000
		120/240	ET GLM 3676E T 240 □ □	Z	W & N	2000
		300	ET GLM 3676E T 300 □ □	Z	W & N	2000