
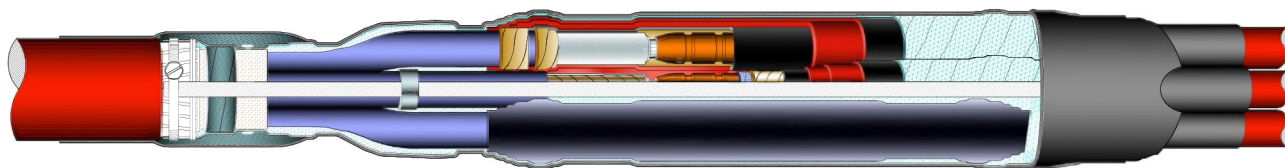


# HEAT SHRINKABLE JOINTS for SPECIAL APPLICATIONS on MV cables

## Transition joint for 3 core PILC SEPARATE-LEAD-SHEATH (radial field) cable to three 1 core polymeric insulated cables

The kit consists of transparent oil barrier, stress control, insulating, double wall insulating-semiconducting, and adhesive lined protective heat shrink tubes and breakout. The hot-melt adhesive ensures the perfect sealing of the joint.

Compliant with standards  
CENELEC HD 629.2 S2, CEI 20-62/2

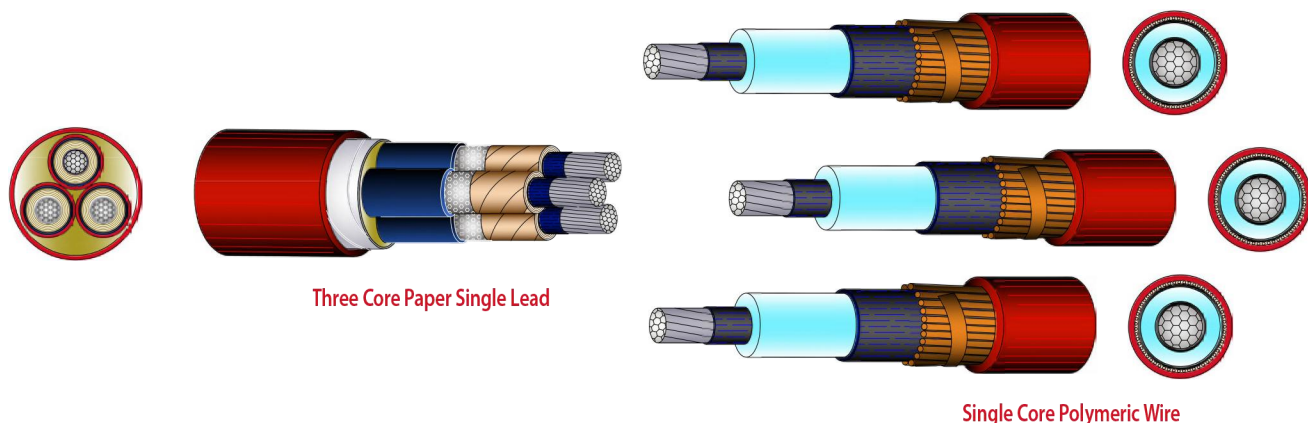

List of kits available for use with crimp connectors. Connectors not included.

Famiglia Prodotti Type	Tensioni Voltage $U_0/U/U_{max}$ [kV]	Sezioni Cavi Cable Range [mm <sup>2</sup> ]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	Lunghezza Length [mm]
ET GLM 63E	8,7/15/17,5	120/240	ET GLM 1763E T 240 □ □	X or Z	W	900
	12/20/24	70/240	ET GLM 2463E T 240 □ □	X or Z	W	900
	19/33/36	95/240	ET GLM 3663E T 240 □ □	X or Z	W	1000