


# HEAT SHRINKABLE JOINTS for SPECIAL APPLICATIONS on MV cables

## Transition joint kit between 1 core PILC cable and 1 core polymeric cable

The kit consists of transparent oil barrier, stress control, insulating, double wall insulating-semiconducting, and adhesive lined protective heat shrink tubes. The hot-melt adhesive ensures the perfect sealing of the joint. The mechanical protection of armoured cables is restored by an aluminium joint case (canister).

Compliant with standards  
CENELEC HD 629.2 S2, CEI 20-62/2

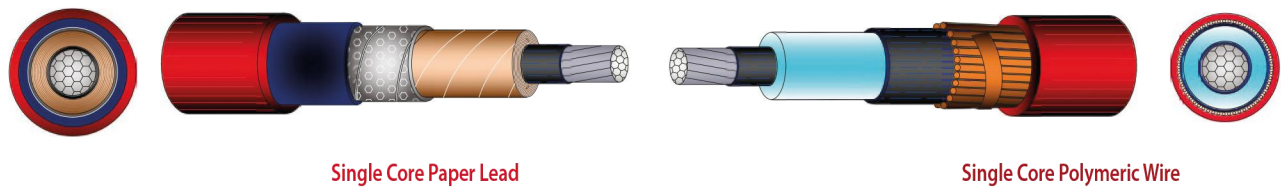

Single Core Paper Lead

Single Core Polymeric Wire



List of kits available for use with crimp connectors. Connectors not included

Famiglia Prodotti Type	Tensioni Voltage U <sub>0</sub> /U/U <sub>max</sub> [kV]	Sezioni Cavi Cable Range [mm <sup>2</sup> ]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	Lunghezza Length [mm]
ET GLM 87	12/20/24	50/240	ET GLM 2487 U 240 □ □	X	W	850
	19/33/36	50/240	ET GLM 3687 U 240 □ □	X	W	900