
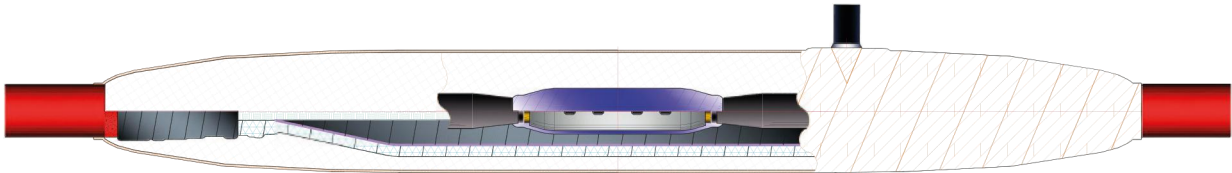


RESIN JOINTS for MV polymeric cables

Transition joint kit between 1 core PILC cable and 1 core polymeric cable

The kit consists of self-bonding tapes with high dielectric properties, polyurethane resin, and room temperature hardener for the outer protection.

Compliant with standards
CENELEC HD 629.1 S2, CEI 20-62/1

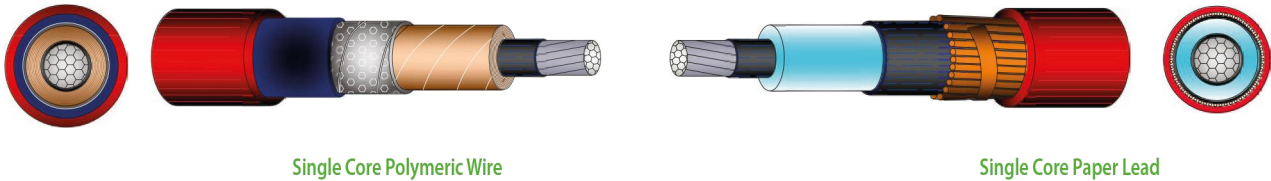

List of kits available for use with crimp connector. Connectors not included.

Famiglia Prodotti Type	Tensioni Voltage $U_0/U/U_{max}$ [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	Lunghezza Length [mm]
EB GLM 60	12/20/24	150	EB GLM 2460 U 150 □ □	X	W & N	800
		240	EB GLM 2460 U 240 □ □	X	W & N	800
		400	EB GLM 2460 U 400 □ □	X	W & N	800
		630	EB GLM 2460 U 630 □ □	X	W & N	800