



# On-load Disconnecting Switches for outdoor horizontal mounting

Type	Order No	Rated voltage	Rated current	Short time current	Peak current	Test Voltage				Weight
						AC		Impulse	1,2/50 $\mu$ s	
						between current-carrying parts and earth	between open contacts	between current-carrying parts and earth	between open contacts	
		kV	A	kAeff	kAmax	kV	kV	kV	kV	kg
ROSM POCM	7712400	12	400	16	40	35	45	75	85	110
	7712630	12	630	16	40	35	45	75	85	110
	7724400	24	400	16	40	55	75	125	145	160
	7724630	24	630	16	40	55	75	125	145	160

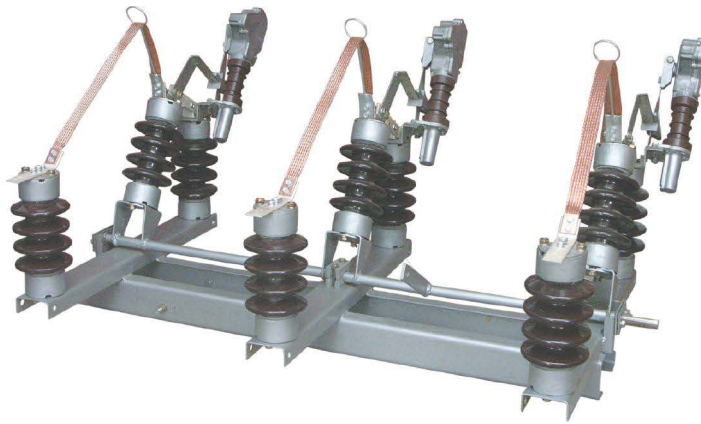

ROSM

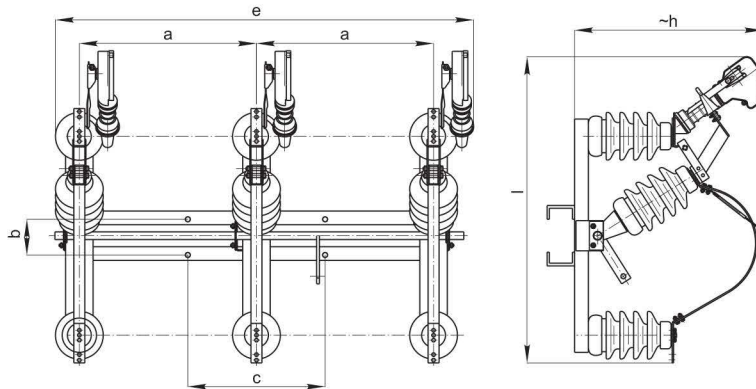

ROSM	Dimensions					
kV	a	b	c	e	h	i
	mm					
12	450	170	170	1130	835	1000
24	645	170	410	1525	945	1120