


HEAT SHRINKABLE JOINTS for MV paper insulated (PILC) cables


Joint kit for 3 core BELTED cables (non-radial field)

The kit consists of heat shrink tubes, transparent oil barrier, stress control, insulating, double wall insulating-semiconducting sleeve, breakout, and adhesive lined protective heat shrink tubes. The hot-melt adhesive ensures the perfect sealing of the joint.

Compliant with standards
CENELEC HD 629.2 S2, CEI 20-62/2

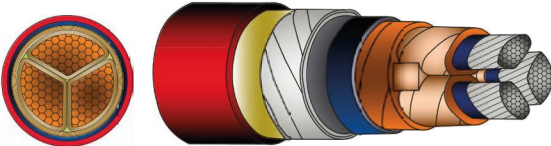

Three Core Belted Paper

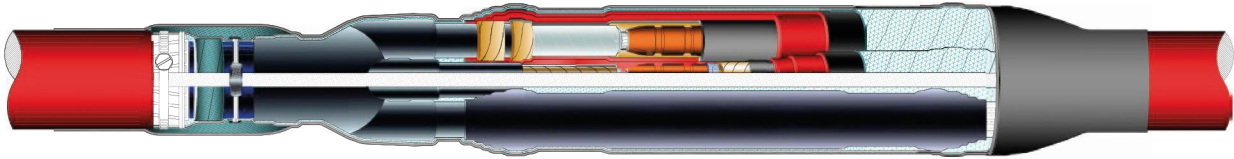

List of kits available for use with crimp connectors. Connectors not included

Famiglia Prodotti Type	Tensioni Voltage U ₀ /U/U _{max} [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	Lunghezza Length [mm]
ET GLC 65	6,35/11/12	10/25	ET GLC 1265 T 025 □	X or Z	n.a.	-
		16/50	ET GLC 1265 T 050 □	X or Z	n.a.	-
		240/400	ET GLC 1265 T 400 □	X or Z	n.a.	-
		50/70	ET GLC 1265 T 070 □	X or Z	n.a.	-
		95/150	ET GLC 1265 T 150 □	X or Z	n.a.	-
	8,7/15/17,5	25/95	ET GLC 1765 T 095 □	X or Z	n.a.	-
		50/70	ET GLC 1765 T 070 □	X or Z	n.a.	-
		70/240	ET GLC 1765 T 240 □	X or Z	n.a.	-