
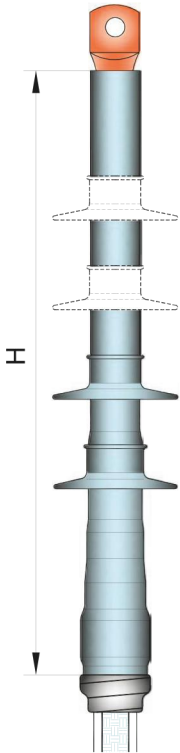


COLD SHRINKABLE TERMINATIONS for MV polymeric cable

Outdoor termination kit 1 core for aerial type cable

The kit consists of stress control element, cold-shrink anti-tracking bodies and rain sheds.

Compliant with standards
CENELEC HD 629.1 S2, CEI 20-62/1

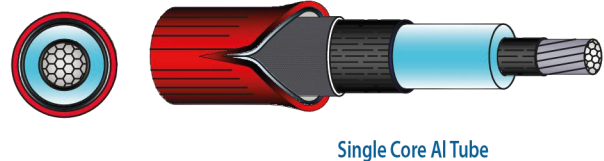

List of kits available for use with crimp and mechanical lugs. Lugs not included.

Famiglia Prodotti Type	Tensioni Voltage $U_0/U/U_{max}$ [kV]	Sezioni Cavi Cable Range [mm ²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	H [mm]	Campane/Fase Rain Sheds/Core
EC TES 62	12/20/24	50/95	EC TES 2462 M 095 □ □	X	A	450	2
		120/240	EC TES 2462 M 240 □ □	X	A	450	2
		300/400	EC TES 2462 M 400 □ □	X	A	500	2
		500/630	EC TES 2462 M 630 □ □	X	A	500	2
	19/33/36	35/70	EC TES 3662 M 070 □ □	X	A	700	4
		95/240	EC TES 3662 M 240 □ □	X	A	700	4
		300/400	EC TES 3662 M 400 □ □	X	A	750	4
		500/630	EC TES 3662 M 630 □ □	X	A	750	4