
Universal repair joint kit for 1 core PILC cable and 1 core polymeric cable

Joints used to repair and splice damaged cables. The kit consists of stress control, insulating, double wall insulating-semiconducting, and adhesive lined protective heat shrink tubes. The hot-melt adhesive ensures the perfect sealing of the joint. Available in two versions: with ready-to-use cable piece or long shear bolt mechanical connector.

Compliant with standards

CENELEC HD 629.1 S2, CEI 20-62/1

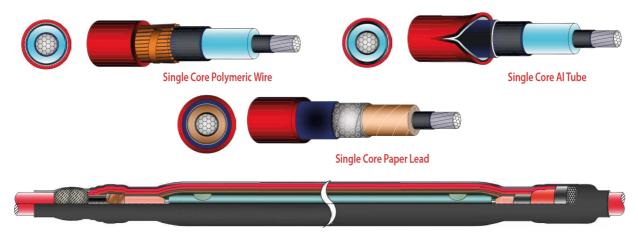

List of kits available for the version with long shear bolt mechanical connectors. Connectors included.

Famiglia Prodotti Type	Tensioni Voltage Uo/U/Umax [kV]	Sezioni Cavi Cable Range [mm²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	Lunghezza Length [mm]
ET GLUG 88R	12/20/24	70/240	ET GLUG 2488R U 240 🗆	Χ	n.a	1350
	19/33/36	70/240	ET GLUG 3688R U 240 □	Χ	n.a	1350



Elenco dei kit disponibili con cavo di apporto. Cavo e connettori inclusi.

List of kits available for the version with long shear bolt mechanical connectors. Connectors included.

Famiglia Prodotti Type	Tensioni Voltage Uo/U/Umax [kV]	Sezioni Cavi Cable Range [mm²]	Rif. Ordine Ordering Info	Variante Armatura Armouring	Variante Schermo Cable Shield	Lunghezza Length [mm]
ET GLUG 90R	12/20/24	70/240	ET GLUG 2490R U 240 🗆	Х	n.a.	1500
	19/33/36	70/240	ET GLUG 3690R U 240 □	Χ	n.a.	1600